

MODEL 3255 Accelerometer

PC Board Mountable Accelerometer

0.5 to 4.5 VDC Output

Integral Temperature Compensated


10,000g Over-Range Protection

DESCRIPTION

The Model 3255 is a two-chip accelerometer designed for surface mount applications. The package can be mounted in one of two orientations, allowing the measurement axis to be either parallel or perpendicular to the mounting surface without the use of costly brackets. This accelerometer consists of a micro machined silicon mass suspended by multiple beams from a silicon frame. Piezoresistors located in the beams change their resistance as the motion of the suspended mass changes the strain in the beams. Silicon caps on the top and bottom of the device are added to provide over-range stops. This design provides for a very low profile, high shock resistance, durability and built-in damping over a wide

usable bandwidth. A patented self-test feature is also built into the sensor.

By applying a voltage to the self-test pin, an electrostatic force is created that attracts the seismic mass towards the top cap, simulating an acceleration and allowing proper sensor function to be verified.

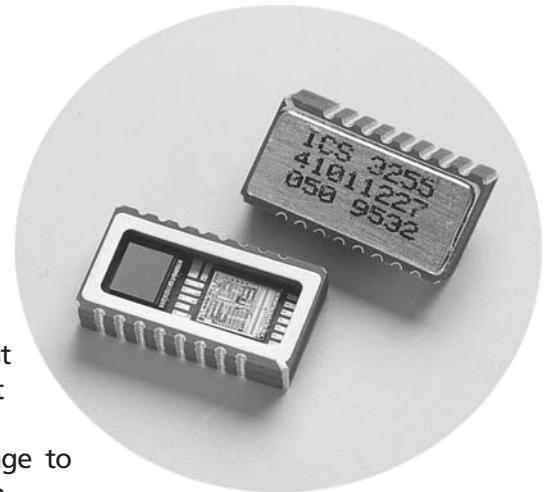

FEATURES

- ◆ Surface Mount Package
- ◆ Three Axis Mounting Options
- ◆ Self Test Function
- ◆ DC Response
- ◆ Gas Damping
- ◆ Built-in Overrange Stops

APPLICATIONS


- ◆ Impact Testing
- ◆ Vibration/Shock Monitoring
- ◆ Crash Applications
- ◆ Aerospace Testing

Vibration Sensors Technical Support:
 Tel: 949-716-5377
 Fax: 949-916-5677
 Email: vibration@meas-spec.com

standard ranges

Range	g
±25	•
±50	•
±100	•
±250	•
±500	•

dimensions

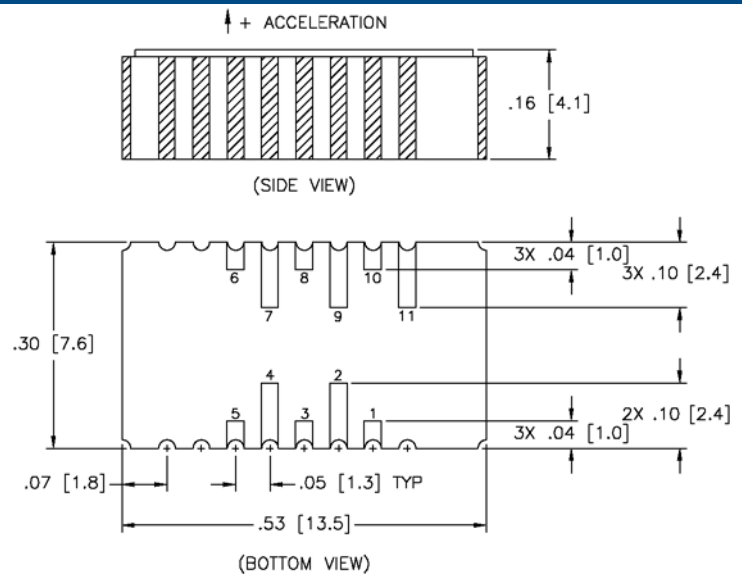

US Patents 5,103,667; 5,253,510; 5,445,006; 5,503,016; and 5,616,863 apply



Model 3255 Accelerometer

performance specifications

All values are typical at 25°C, 100Hz and 5Vdc excitation unless otherwise stated.

Measurement Specialties reserves the right to update and change these specifications without notice.

PARAMETERS	RANGE			UNITS	NOTES
	±25G	±50G	±100G		
Bandwidth(MIN)	0-1000	0-1000	0-1500	Hz	5
Sensitivity (MIN/MAX)	72.0/88.0	36.0/44.0	18.0/22.0	mV/g	

PARAMETERS	RANGE		UNITS	NOTES
	±250G	±500G		
Bandwidth(MIN)	0-2000	0-2000	Hz	5
Sensitivity (MIN/MAX)	7.2/8.8	3.6/4.4	mV/g	

PARAMETERS	ALL RANGES			UNITS	NOTES
	MIN	TYP	MAX		
Zero Acceleration Output	2.4	2.5	2.6	Volts	
Non-linearity		0.2	1.0	±%Span	1
Transverse Sensitivity		1	3	±%Span	
Supply Voltage	4.5	5.0	7.0	Volts	2
Supply Current			10	mA	
Self-Test Input Voltage	-30		0	Volts	3, 4
Self-Test Response (Vst = -5V)	-0.89	-1.48	-2.07	G	3, 4
Self-Test Input Current (Vst = -5V)			0.1	mA	3, 4
Self-Test Accuracy	-5		5	%	3, 4
Output Source Current (load to ground)	1.0			mA	
Output Sink Current (supply to load)	0.5			mA	
Shock Limits			10,000	G	
Thermal Zero Shift (-20°C to +85°C)	-5		+5	%FSO	
Thermal Sensitivity Shift (-20°C to +85°C)	-5		+5	%FSO	
Compensated Temperature	-20°C to +85°C Contact factory for custom temperature compensation				
Operating Temperature	-40°C to +125°C				
Weight	1.5 Grams				

Notes

1. Best Fit Straight Line.
2. Output is ratio metric with supply voltage in the range of (5.0 ± 0.5) V.
3. Applying the self-test input voltage simulates an acceleration. The sensor output is proportional to the square of the voltage difference between the self-test input and the positive supply. When not using the self-test function, the self-test input pin should be connected to the positive supply voltage. For detailed description refer to Technical Note TN010.
4. Self-test input voltage is with respect to supply voltage. For example, if supply voltage is 5 VDC then Vst = -5 V is equivalent to ground.
5. The useful frequency range is defined as the range of frequencies over which the device sensitivity is within ±5% of the DC value.
6. The alarm output is a digital output which is 0 V during normal operation and 5 V when the output voltage of the accelerometer die is outside the normal range. This is the case if there is a malfunction of the accelerometer or a broken wire bond to the sensor.
7. View Technical Note TN-010 for more information on the 3255 accelerometer.

ordering information



Vibration Sensors Technical Support:

Tel: 949-716-5377
Fax: 949-916-5677
Email: vibration@meas-spec.com

electrical schematic

Pad	Function
1	Alarm Function
2	Signal Output
3	Ground
4	+5V Supply
5	Self Test
6 thru 11	No Electrical Connection

CONTATO

Endereço

Rua Sete de Setembro, 2671 - Centro
13560-181 - São Carlos - SP - Brasil

Telefone

+ 55 (16) 3371-0112

Fax

+ 55 (16) 3372-7800

Internet

www.metrolog.net
metrolog@metrolog.net

