

Model 64B Accelerometer



- DC Response**
- Durable Cable**
- Small Package**
- Reliable Performance**

DESCRIPTION

The **Model 64B** accelerometer is based on an advanced piezoresistive MEMS sensing element which offers exceptional dynamic range and stability. This unit features a full bridge output configuration with a temperature range from 0 to +50° C. A slight amount of internal gas damping provides outstanding shock survivability and a flat amplitude/phase response up to 8kHz. The Model 64B is compliant with SAE J211 standards for anthropomorphic dummy instrumentation.




FEATURES

- ◆ 2nd GEN MEMS Sensing Element
- ◆ ± 50 to ±6,000 g Ranges
- ◆ 2-10 Vdc Excitation
- ◆ 0-50°C Temperature Range
- ◆ High Impact Cable
- ◆ 1% Transverse Sensitivity Available
- ◆ <± 25 mV Zero Offset

APPLICATIONS

- ◆ Safety Crash Testing
 - Auto
 - Truck
 - Recreational Vehicles
- ◆ Shock Testing

dimensions

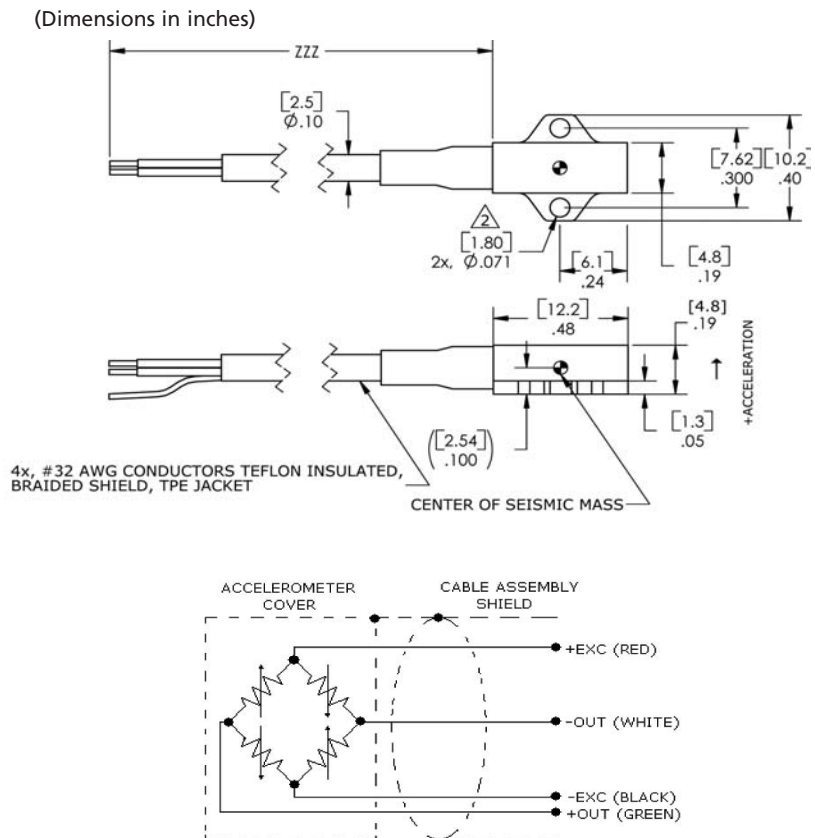

Vibration Sensors Technical Support:
 Tel: 949-716-5377
 Fax: 949-916-5677
 Email: vibration@meas-spec.com



Model 64B Accelerometer

performance specifications

All values are typical at +24°C, 100 Hz and 10 Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters							Notes
DYNAMIC							
Range(g)	±50	±100	±200	±500	±2000	±6000	
Sensitivity (mV/g)	2	0.9	0.9	0.4	0.15	0.1	0.20 Max > 500g to prevent instrumentation saturation
Frequency Response (Hz)	0-400	0-500	0-800	0-1200	0-3000	0-3000	±2%
	0-1000	0-1200	0-2000	0-3000	0-6000	0-6000	±5%
	0-1400	0-1500	0-2800	0-4200	0-8000	0-8000	±1dB
Resonance (Hz)	4000	6000	8000	15000	26000	26000	
Shock Limit	10000	10000	10000	10000	10000	10000	g
Non-Linearity			±1		% Reading		±2% Reading for ±6,000 g
Repeatability (Equiv. g's)			0.2				After full scale shock
Transverse Sensitivity			<3		%		1% available
Zero Acceleration Output			<±25		mV		
Thermal Zero Shift		±0.04 (±0.02)			%FSO/°C (%FSO/°F)		0°C to +50°C (32 to -122°F)
Thermal Sensitivity Shift		±0.1 (±0.06)			%/°C (%/°F)		0°C to +50°C (32 to -122°F)
Damping Ratio	0.5	0.5	0.5	0.3	0.05	0.05	
Base Strain Sensitivity (Equiv. g's)			<0.1				Per ISA 37.2 @ 250 µ strain
ELECTRICAL							
Voltage Excitation		2 to 10			Vdc		Output ratiometric to excitation. Do not reverse polarity.
Input Resistance		3500-4800			Ω		Measured between +EXC and - EXC
Output Resistance (Varies with current)		2700-4800			Ω		Measured between +OUT and - OUT
Insulation Resistance		>100			MΩ		At 50 Vdc, leads to case and shield
Ground Isolation							Shield is not connected to cover
ELECTRICAL							
Cable Output Connections		+EXC			RED		32 AWG Teflon® Insulated
		-EXC			BLACK		32 AWG Teflon® Insulated
		+OUT			GREEN		32 AWG Teflon® Insulated
		-OUT			WHITE		32 AWG Teflon® Insulated
		CABLE SHIELD			N/A		Braided Wires
		CABLE JACKET			WHITE		TPE
PHYSICAL							
Case Material							Black anodized aluminum
Cover Material							Blue anodized aluminum
Cable Connections							Integral 30 foot cable
Weight		1			gram		Without cable
Mounting							2x 0-80 x 3/16 socket head cap screws (Flat Washers and Allen Wrench included)
Mounting Torque		<3(<0.3)			lb-in (Nm)		
ENVIRONMENTAL							
Operating Temperature		-40 to +121			°C		
Humidity							Epoxy Sealed
PART NUMBERING							
Model Number + Range (g's) + Cable Length							(see sample below)

ordering information

MODEL NUMBER:

64B - ZZZZ - ZZZT
 ↳ <1% Transverse Sensitivity, otherwise leave blank
 ↳ CABLE LENGTH (INCHES) [e.g. 360 IS 360 INCHES OF CABLE]
 ↳ RANGE (g) [e.g. 0200 IS 200g RANGE]

Supplied Materials:

1. Calibration Certificate
2. Mounting Screws (P/N AC-D02009) x 2
3. Washers (P/N AC-D02008) x 2
4. Allen Wrench

Custom connector options are available.

Contact Measurement Specialties, Inc. for applicable model number.

Vibration Sensors Technical Support:

Tel: 949-716-5377

Fax: 949-916-5677

Email: vibration@meas-spec.com



Distribuidor

Brasil e América do Sul

CONTATO

Endereço

Rua Sete de Setembro, 2671 - Centro
13560-181 - São Carlos - SP - Brasil

Telefone

+55 (16) 3371-0112

Fax

+55 (16) 3372-7800

Internet

www.metrolog.net
metrolog@metrolog.net

