

Model EGCS3-D Triaxial Accelerometer

DC Response

10,000 g Overrange Stops

High Sensitivity


Shielded Cable

DESCRIPTION

The Model EGCS3-D triaxial accelerometer is available in ranges from ± 5 g through ± 5000 g. With overrange limit to $\pm 10,000$ g and spring strain relief, this rugged device is ideal for offshore, downhole and shock testing applications. Its small size and screw mounting ensure ease of installation while its low power requirements and DC output facilitate integration into data acquisition and monitoring systems. The EGCS3 also features CE Conformance to EN 61010-1, EN 50081-1 and EN 50082-1.



dimensions

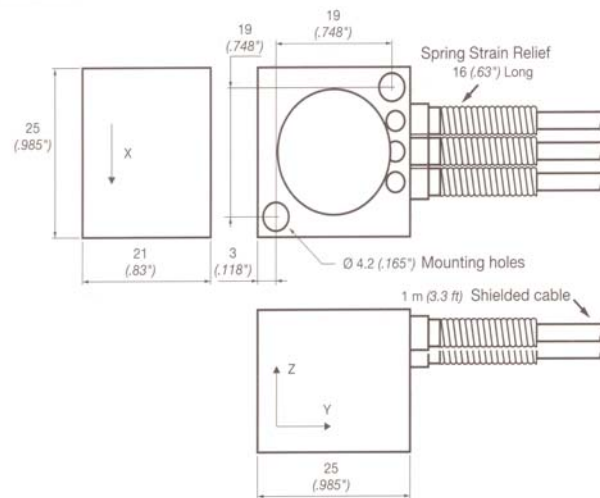

Dimensions in mm (inches)


FEATURES

- ◆ 3 Axes
- ◆ Cable Strain Relief
- ◆ Static and Dynamic Measurement
- ◆ Frequency Response through 4000 Hz
- ◆ $\pm 1\%$ Non-Linearity
- ◆ -40°C to $+120^{\circ}\text{C}$ Operating Temperature Range
- ◆ 10,000 g Overrange Protection

APPLICATIONS

- ◆ Blast Testing
- ◆ Machine Control
- ◆ Performance Testing
- ◆ Engine Testing

wiring for each separate axis



www.meas-spec.com
 Tel: 949-716-5377
 Fax: 949-916-5677
 Email: vibration@meas-spec.com



Model EGCS3-D Accelerometer

performance specifications

All values are typical at 24°C and at 15 Vdc excitation unless otherwise stated. Measurement Specialties, Inc. reserves the right to update and change these specifications without notice.

PARAMETERS

DYNAMIC

Range (g)	5	10	25	50	100	250	500	1000	2500	5000
Sensitivity (mV/g)	30	20	8	4	2	0.8	0.4	0.2	0.08	0.04
Nominal Frequency Response (Hz)	0-150	0-200	0-400	0-600	0-900	0-1300	0-1750	0-2500	0-3500	0-4000
Nominal Resonance (Hz)	300	400	800	1200	1800	2600	3500	5000	7000	8000
Non-Linearity (%)					±1					
Transverse Sensitivity (% MAX)					2					
Zero Acceleration Output (±mV)					15					
Thermal Zero Shift (50°C/100°F)					±2.0mV					
Thermal Sensitivity Shift (50°C/100°F)					±2.5%					
Damping Ratio (Nominal)					0.7					

ELECTRICAL

Voltage Excitation (Vdc)					15					
Input Resistance (ohms)					2K					
Output Resistance (Ohms)					1K					
Cable Output Connections										
Red					+EXC					
Black					-EXC					
Green					+OUT					
White					-OUT					

PHYSICAL

Case Material					Aluminum					
Cable Length (Meter/Feet)					1 / 3.28					
Weight (grams)					<50					
Mounting					Screw					

ENVIRONMENTAL

Shock Limit Sensitive Axis (g)	500	1000	2000	5000	10000	10000	10000	10000	10000	10000
Operating Temperature (°C/°F)					-40 to 120/-40 to 250					
Compensated Temperature (°C/°F)					20 to 80/70 to 170					

ordering information

EGCS3 - D - 100 - /L2M/C

|

Range

|

Options

C

L00F or L00M

options

COMPENSATED TEMPERATURE RANGES:	STANDARD	= 20°C to 80°C (70°F to 170°F)
	Z*	= Non-standard, contact factory
EXCITATION VOLTAGE:	STANDARD	= 15VDC
SPECIAL CABLE LENGTH:	L00F	= Replace "00" with total length in feet.
	L00M	= Replace "00" with total length in meters.
CONNECTOR WIRED TO CABLE:	C	= Microtech type male or equivalent

www.meas-spec.com
 Tel: 949-716-5377
 Fax: 949-916-5677
 Email: vibration@meas-spec.com

CONTATO

Endereço

Rua Sete de Setembro, 2671 - Centro
13560-181 - São Carlos - SP - Brasil

Telefone

+ 55 (16) 3371-0112

Fax

+ 55 (16) 3372-7800

Internet

www.metrolog.net
metrolog@metrolog.net



Metrolog Controles de Medição