

# Model EGPE-2A Accelerometer

Charge Output Accelerometer  
High Temperature Performance  
Wide Bandwidth  
Hermetically Sealed

## Description

The Measurement Specialties model EGPE-2A is a piezoelectric charge mode accelerometer designed for high frequency vibration and shock measurements. The accelerometer incorporates an annual shear mode crystal that provides stable thermal response up to +260°C. The model EGPE-2A is hermetically sealed and features the popular through hole mount installation for use with standard mounting screws.




dimensions

## FEATURES

- Through Hole Mount Accelerometer
- Accommodates Standard Mounting Screws
- Ranges:  $\pm 50g$  to  $\pm 2000g$
- Wide Bandwidth
- +260°C Operation
- High Shock Limits
- Stable Temperature Response
- Annular Shear Mode Crystal
- Hermetically Sealed

## APPLICATIONS

Aerospace and Flight Test Applications  
Vibration/Shock Monitoring  
High Temperature Applications  
High Frequency Applications

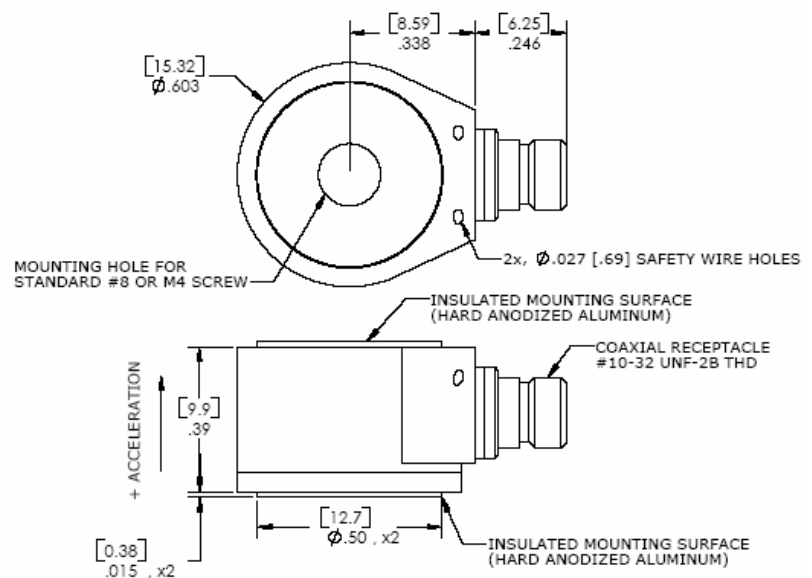

Measurement Specialties, Inc.  
1000 Lucas Way  
Hampton, VA 23666 USA  
Tel: +1-757-766-1500  
Fax: +1-757-766-4297  
[www.meas-spec.com](http://www.meas-spec.com)

Vibration Sensors Technical Support  
Tel: +1-949-716-5377  
Fax: +1-949-916-5677  
Email: [vibration@meas-spec.com](mailto:vibration@meas-spec.com)

# Model EGPE-2A Accelerometer

## performance specifications

All values are typical at 24°C, 100Hz unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

### Parameters


				Units	Notes
<b>DYNAMIC</b>					
Range <sup>1</sup>	±50	±500	±2000	g	
Sensitivity	20.0	13.0	6.5	pC/g	Nominal
Frequency Response <sup>2</sup>	1-5000	1-10000	1-12000	Hz	±5%
Frequency Response <sup>2</sup>	.1-10000	.1-15000	.1-15000	Hz	±1dB
Resonant Frequency	40	40	48	kHz	Typical
Shock Limit	5000	5000	5000		
Linearity		±2		%	Maximum
Transverse Sensitivity (Max)		±5		%	±3% Typical
<b>ELECTRICAL</b>					
Capacitance		1050		pF	Nominal
Insulation Resistance (@50Vdc)		100		MΩ	Minimum
Grounding		Case Grounded			
Ground Isolation		Isolated			
<b>PHYSICAL</b>					
Sensing Element		Ceramic (shear mode)			
Housing		Stainless Steel			
Weight		11		grams	
Mounting		Through Hole (#8 or M4 cap screw)			
<b>ENVIRONMENTAL</b>					
Shock Limit		5,000		g's	
Operating Temperature		-54 to +260		°C	
Humidity		Hermetically sealed			
<b>OPTIONAL ACCESSORIES</b>					
310-XXX		Cable Assembly (XXX designates length in inches, 10ft standard)			
AC-D02327		Triax Mounting Block			
AC-D02328		Adhesive Mounting Adaptor			
AC-D02636		Magnetic Mounting Adaptor			

<sup>1</sup> Operating range over which the accelerometer meets the linearity specifications

<sup>2</sup> Low-end response of the accelerometer is a function of its associated electronics.

## ordering information

### EGPE-2A-2000

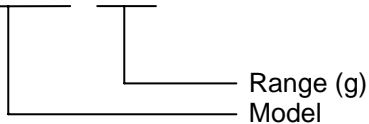

### CONTATO

#### Endereço

Rua Sete de Setembro, 2671 - Centro  
13560-181 - São Carlos - SP - Brasil

#### Telefone

+ 55 (16) 3371-0112

#### Fax

+ 55 (16) 3372-7800

#### Internet

[www.metrolog.net](http://www.metrolog.net)  
[metrolog@metrolog.net](mailto:metrolog@metrolog.net)



Metrolog Controles de Medição