


IEM 422 (Process Control & Power Gen)

The **IEM 422** is a line-powered LVDT / RVDT compatible current transmitter designed for industrial process control applications. The IEM-422 consists of a DIN rail mount power supply and LVDT signal conditioner module pre-configured to supply a 4 to 20 mA output from a 115 or 230 volt AC supply. The IEM 422 supplies an ac sine wave excitation to the LVDT and then demodulates and amplifies the LVDT output. A full-wave synchronous demodulator eliminates quadrature and harmonics to maximize external noise rejection.

The IEM 422 is housed in a rugged NEMA 13 enclosure to protect it from dirt, dust, water and other contaminants commonly found in industrial environments. Power, input and signal output connections are made easy by using the conduit ports to make the appropriate connections. LVDT hookup is completed by mating to the box-mounted, sealed M/S-style bayonet connector.

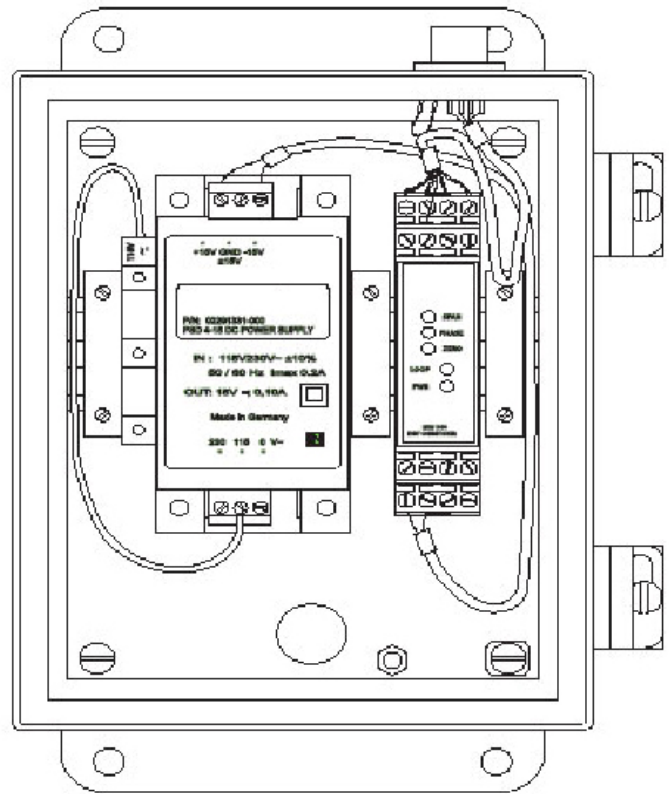

FEATURES

- 4-20 mA Position Signal
- Compatible with All Schaevitz LVDT's & RVDT's
- NEMA-13 Rated Enclosure
- 115 / 230 Volt ac Line Operation
- Power & Loop Status LED's
- Adjustable Zero, Phase and Span

APPLICATIONS


- Steam Turbine Throttle Valve Position
- Pulp Paper Industry
- Petrochemical Process Control
- Roller Gap Process Control

PERFORMANCE SPECIFICATIONS


Power Requirement	115 V-ac / 240 V-ac
Transducer Excitation	3-Vrms (0.5-Volt switch selectable)
LVDT Drive Current	25 mA (maximum)
LVDT Input Impedance	125 Ohms (minimum @ 3-Vrms)
Excitation Frequency	2.5 kHz (5.0, or 10.0 kHz switch selectable)
Full Span Output Signal	4 to 20 mA
Zero Output	12 mA
Zero Adjustment Total Range	+/- 30% (FRO)
Frequency Response	3-dB down @ 250-Hz (1-kHz switch selectable)
Nonlinearity	≤ 0.02% of FS
Temperature Coefficient	≤ +/- 0.05% per degree F (fso)
Operating Temperature Range	-25 to 70C
Dimensions (L x W x H)	3.86 x 2.48 x 1.38 (inches)

IEM 422 (Process Control & Power Gen)

dimensions

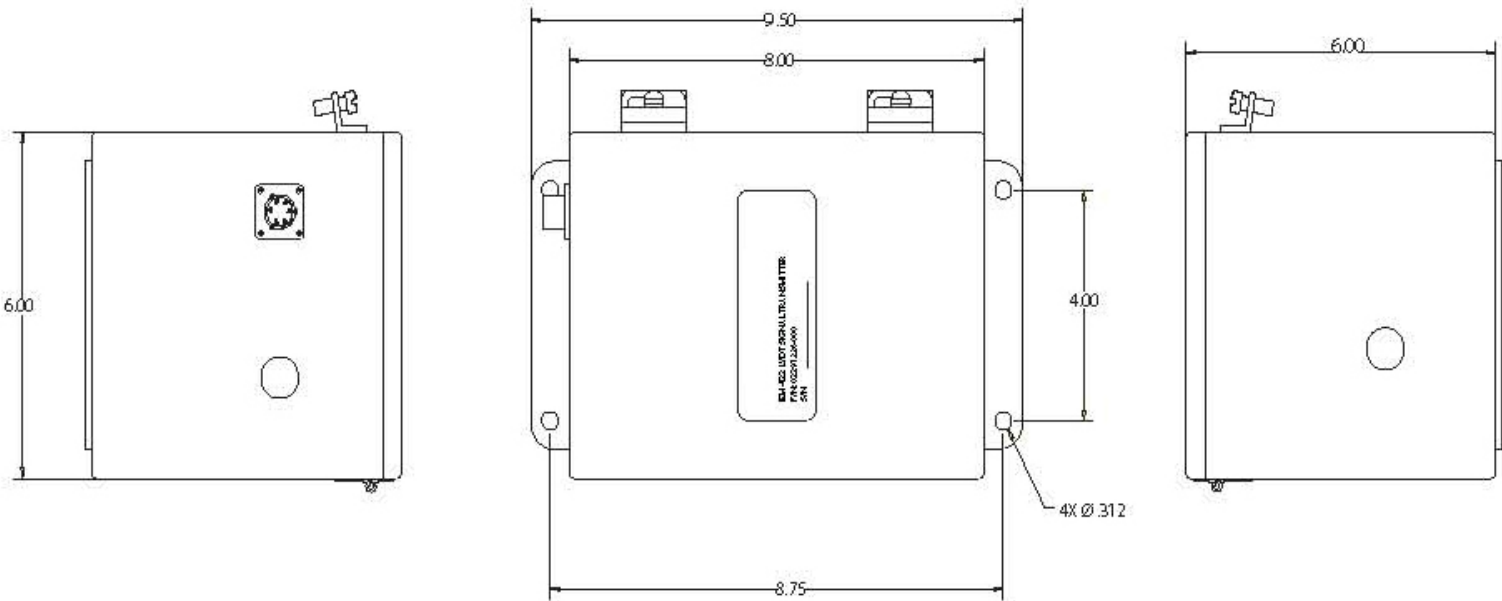

wiring

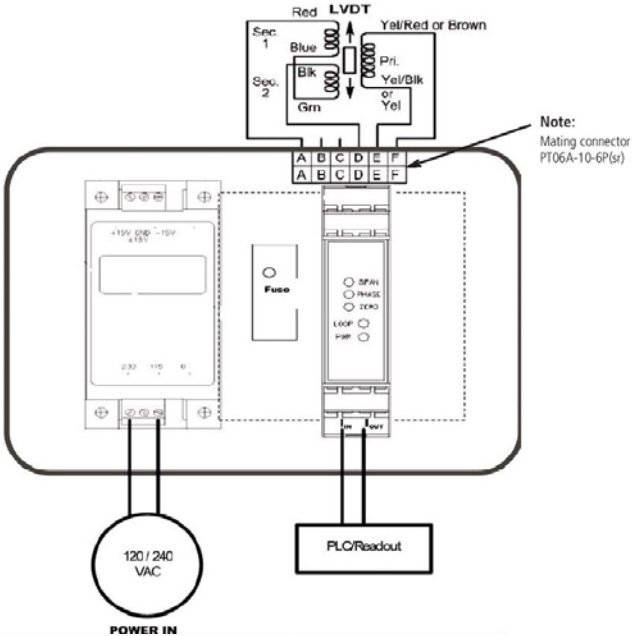

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

CONTATO

Endereço

Rua Sete de Setembro, 2671 - Centro
13560-181 - São Carlos - SP - Brasil

Telefone

+ 55 (16) 3371-0112

Fax

+ 55 (16) 3372-7800

Internet

www.metrolog.net
metrolog@metrolog.net



Metrolog Controles de Medição