

# 4426 Pressure Sensor

PC Board Mountable Pressure Sensor

0-100 mV Output

Gage and Absolute Pressure

Temperature Compensated


## DESCRIPTION

The **4426** is a temperature compensated, piezoresistive silicon pressure sensor packaged in a dual-in-line configuration and intended for cost sensitive applications where excellent performance and long-term stability are required.

Integral temperature compensation is provided over a range of 0-50°C using laser-trimmed resistors.

The pressure sensor is available in absolute or gage

pressure ranges from 0-1 psi to 0-100 psi. The pressure port is a 1/8" barbed port which mates with 3/32" ID tubing. The tube is vertically mounted to the printed circuit board. For a horizontally mounted tube in differential and absolute pressure, refer to model 4425.

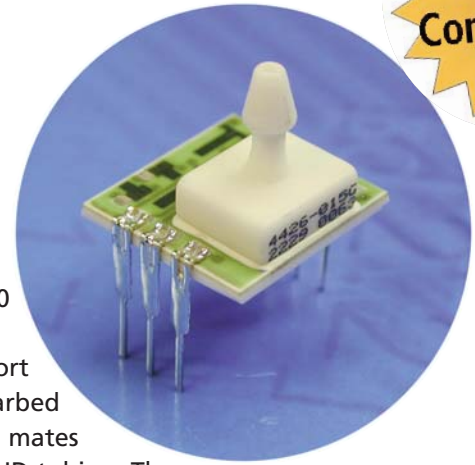


## FEATURES

- ◆ Dual-in-line Package
- ◆ 0°C to +50°C Compensated Temperature Range
- ◆ ±0.25% Pressure Non-linearity
- ◆ Solid State Reliability

## APPLICATIONS

- ◆ Medical Instruments
- ◆ Altitude/Airspeed Measurement
- ◆ Process Control
- ◆ Factory Automation
- ◆ Leak Detection

## dimensions

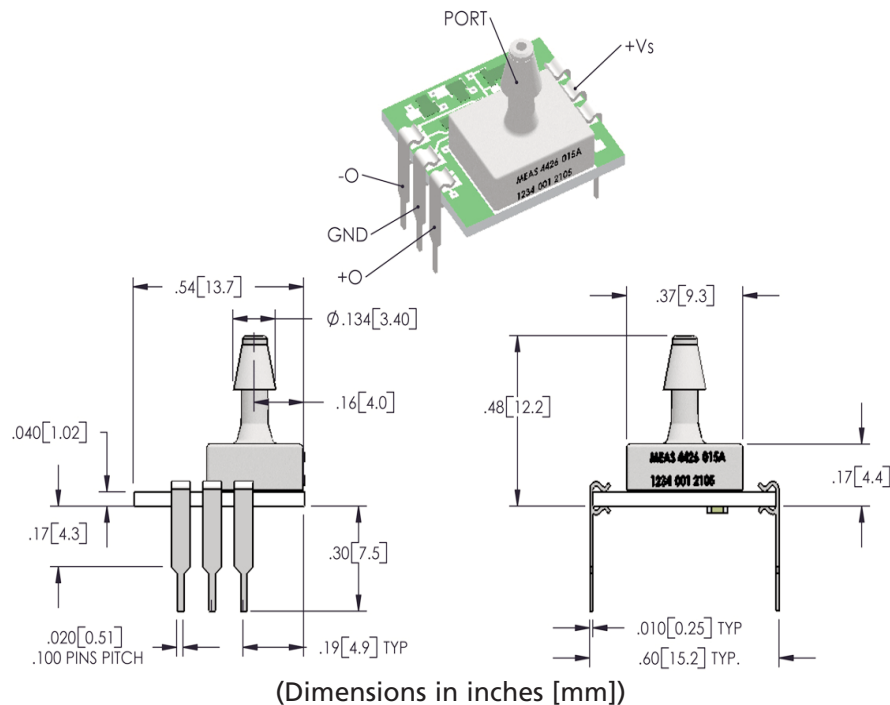

## standard ranges

Range	psig	psia
0 to 1	•	
0 to 5	•	
0 to 15	•	•
0 to 30	•	•
0 to 50	•	•
0 to 100	•	•

# 4426 Pressure Sensor

## performance specifications


All parameters measured at 12V and at 25°C after 10 second warm up unless otherwise specified.

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Full Scale Output (0-1 PSI)	17.6	18	18.4	mV	1
Full Scale Output (0-5 PSI)	58	60	62	mV	1
Full Scale Output (0-15 to 0-50 PSI)	88	90	92	mV	1
Full Scale Output (0-100 PSI)	98	100	102	mV	1
Zero Pressure Output	-1	±0.2	1	mV	1
Pressure Non Linearity	-0.25		0.25	% Span	2
Pressure Hysteresis		±0.2		% Span	
Input Resistance	5000	15000	25000	Ω	
Output Resistance	3500	5000	6500	Ω	
Temperature Error – Span (0 to +50°C)	-1		1	% Span	3
Temperature Error – Zero (0 to +50°C)	-0.75	±0.2	0.75	mV	3
Supply Voltage		12	20	V	
Long Term Stability (Offset & Span)		±0.1		mV	4
Pressure Overload			3X	Rated	5
Compensated Temperature Range	0°C to +50°C				
Operating Temperature Range	-25°C to +85°C				
Storage Temperature Range	-40°C to +125°C				
Solder Temperature	260°C Max 5 Sec.				
Humidity	0 to 85% RH				
Media	Non-Corrosive Dry Gases Compatible with Silicon, Pyrex, RTV, Ceramic & Gold				
Weight	3 g				


### Notes

1. Ratiometric to supply voltage.
2. Best fit straight line.
3. Maximum temperature error between 0°C and 50°C with respect to 25°C.
4. Long term stability over a one year period.
5. 3X or 150 psi max, whichever is less
6. For more details refer to 4425/4426 Mounting Application Note.
7. For high humidity applications, contact factory

## ordering information

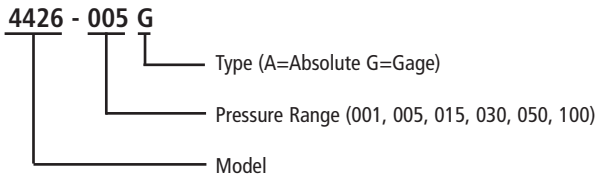

## connections

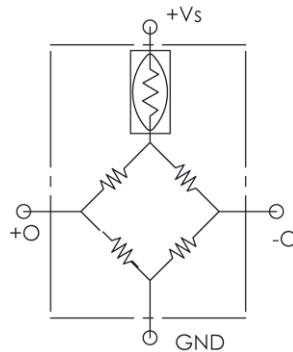

EQUIVALENT CIRCUIT

# Distribuidor

Brasil e América do Sul

## CONTATO

### Endereço

Rua Sete de Setembro, 2671 - Centro  
13560-181 - São Carlos - SP - Brasil

### Telefone

+55 (16) 3371-0112

### Fax

+55 (16) 3372-7800

### Internet

[www.metrolog.net](http://www.metrolog.net)  
[metrolog@metrolog.net](mailto:metrolog@metrolog.net)

