




0717-4321-99

Low Profile Single/Dual Axis Electrolytic Tilt Sensor

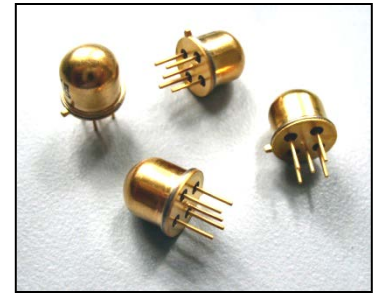

Patent 6,249,984

TrueTilt™

Description

The **0717-4321-99** TrueTilt™ Sensor™ represents a new advancement in electrolytic tilt sensor technology. Robust all metal construction provides durability as well as superior dimensional tolerances, which equates to excellent sensor-to-sensor electrical performance. This sensor is ideal for economical, commercial market applications requiring high production quantities and first-rate accuracy.

- Angle Range ± 40°
- Linear Range ± 15°
- Resolution ±0.005°
- Repeatability ± 0.1°

Applications Include


- » Wheel Alignment
- » Navigation and GPS Compensation
- » Lift Platforms
- » Tip Protection
- » RV Leveling
- » Antenna Positioning

Physical Dimensions

Height	0.330" (8.38mm)
Diameter – Cap	0.325" (8.25mm)
Diameter - Flange	0.360" (9.14mm)
Lead Length	0.20" (5.0mm)
Lead Diameter	0.020" (0.5mm)
Lead Spacing (center to center)	0.1" (2.5mm)

Sensor Test Circuitry

Tests were conducted by exciting the outer electrodes of the sensor in a single axis mode using the Fredericks Universal signal conditioner. Output curve and linearity specifications are shown above. Information on electrolytic tilt sensor signal conditioning is available on the Fredericks web site at www.frederickscom.com.

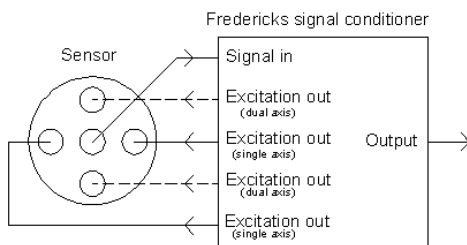

Caution!-Ensure that all test and operating circuits are entirely free of direct current. Direct current will cause level damage and/or instability.


Note! – The housing (center pin) is the active output signal. The unit must be electrically isolated.

Operating Specifications

Operating Range (max.)	± 40°
Linear Range	± 15°
Null Current(max.)	0.2 mA (continuous)
Null Impedance (nom)	85 K Ohms (25°C)
Repeatability	±0.1°
Resolution	≤ 0.005°
Symmetry (typ)	5 %
Null Offset (max)	±3.0°
Mech. Crosstalk/Deg. (to 20°)	±0.025°
Temperature coefficient	
Null	20 arc sec /°C
Scale	0.1% /°C
Stability @24 Hrs.	±0.1°
Operating Temperature	-40° C to +85° C
Storage Temperature	-55° C to +100° C
Time Constant (1)	≤ 100 msec
Materials	magnetic

¹ Difference between electrical and mechanical null

NOTE: Output sensitivity's scale factor may be modified to individual requirements upon special order.

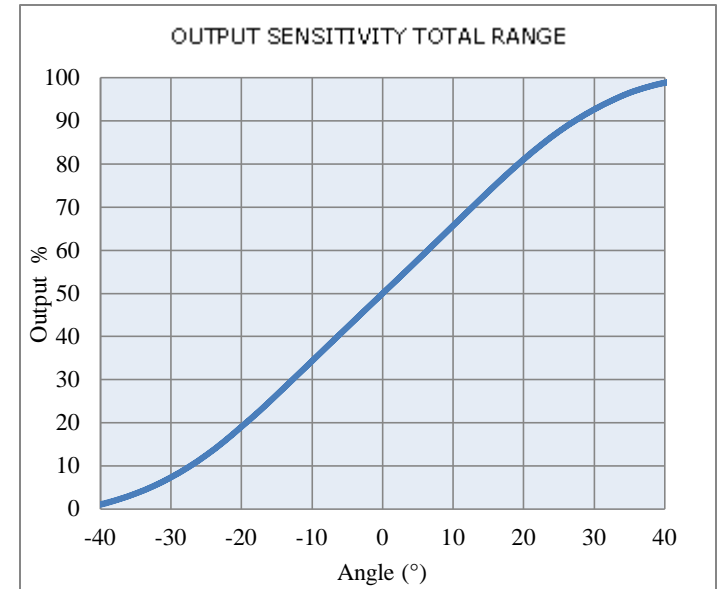

Linearity Specifications

Range (0° to 3°)	Linearity ≤ 0.01°
Range (3° to 8°)	Linearity 1%
Range (8° to 15°)	Linearity 2%



Distribuidor

Brasil e América do Sul

CONTATO

Endereço

Rua Sete de Setembro, 2671 - Centro
13560-181 - São Carlos - SP - Brasil

Telefone

+ 55 (16) 3371-0112
+ 55 (16) 3372-7800

Internet

www.metrolog.net
metrolog@metrolog.net



The Fredericks Company
2400 Philmont Avenue Huntingdon Valley, Pennsylvania 19006-0067

www.metrolog.net / metrolog@metrolog.net

Phone: (215) 947-2500
Fax: (215) 947-7464
Web: www.frederickscom.com
sensors@frederickscom.com