

Preliminary



13208A 23208A

Uniaxial Biaxial

SPECIFICATIONS

- ± 250 g, ± 500 g
Accelerometers With Wide Bandwidth to 10 kHz

This Measurement Specialties product is subject to U.S. Export Law.

Simplify Acceleration and Temperature Measurements

The Measurement Specialties 13208A and 23208A accelerometers include a temperature sensor in their small, rugged package. The small size and built-in power regulation allow the 13208A and 23208A to fit where other accelerometers can't. Choose the bandwidth and range options best suited for your application to measure ± 250 g or ± 500 g accelerations on one or two axes.

The high repeatability of the built-in temperature sensor allows precise compensation of temperature effects. Alignment data provided on the included calibration certificate can be used to manually correct transverse sensitivity and alignment errors, or when extra precision is required, Option C002, offset compensation is available

Tested over the -40 to $+85^{\circ}\text{C}$ temperature range, the accelerometers have a nominal full scale output swing of ± 2 volts. The zero g output level is nominally +2.5 volts. Precise values are available on the included calibration certificate. Custom versions of the 13208A and 23208A can be provided for applications which require different range and/or bandwidth.

FEATURES AND BENEFITS

High Accuracy and Linearity over Wide Temperature Range

The voltage output for each axis of the 13208A and 23208A is directly proportional to the acceleration along that axis. Each DC-coupled output is fully scaled, referenced, and temperature compensated. Accuracy is improved by minimizing variations due to temperature and aging effects, resulting in a sensor that is more stable over temperature than piezoelectric or piezoresistive devices.

Calibration Certificate

Each 13208A and 23208A is supplied with a calibration certificate listing sensitivity and offset, as well as the on-axis and transverse alignment parameters needed to ensure rapid and efficient system implementation. The alignment data can be used to compensate the measured values to achieve an even higher level of sensor accuracy.

Self-Test on Digital Command

A TTL-compatible self-test low input causes a simulated acceleration to be injected into the sensor(s) to verify channel integrity.

Small Size

Complete conditioned uniaxial or biaxial accelerometer in less than a cubic inch.

-Built-In Power Supply Regulation

Unregulated DC power from +8.5 to +36 volts is all that is required to measure acceleration and temperature. Reverse power voltages of up to -80 V can be withstood indefinitely. Transients of +80 V for 550 ms compatible with MIL-STD-704A can be withstood with full operation.

Easy Installation

Built-in terminal block or cable with 9-pin connector makes it easy to wire. Two through-holes and four tapped holes simplify mounting.

Suitable for Harsh Environments

The 13208A and 23208A are robust and can be used in harsh environments. The units will survive 4000 g powered or unpowered.

Warranty


These Measurement Specialties accelerometers come with a three-year factory warranty

SPECIFICATIONS FOR 13208A AND 23208A *-improved specifications available upon request*

Ta = Tmin to Tmax; 8.5 ≤ Vs ≤ 36 V; Acceleration = 0 g unless otherwise noted; within one year of calibration.



Parameter	Min	Typical	Max	Units	Conditions/Notes
Accelerometers Full Scale Range					On each axis, specify with Option Rnnn
Option R250		±250		g	
Option R500		±500		g	
Sensitivity At 25°C					
Option R250		8.0		mV/g	Nominal
Option R500		4.0		mV/g	Nominal
Drift Tmin to Tmax		±1 (TBD)		%	Percent of sensitivity at 25°C
Zero g Bias Level					
At 25°C		2.50 ±0.010		V	Precise values on cal certificate
Drift Tmin to Tmax, Option C001		±2.5		g	At 1.25°C/min temperature rate of change
Drift Tmin to Tmax, Option C002		±500		mg	At 1.25°C/min temperature rate of change
Alignment					Precise values on cal certificate
Deviation from Ideal Axes		±1.0	±3.0	degree	Can be compensated if required
Transverse Sensitivity		±0.25		%	Inherent sensor error, excluding misalignment
Nonlinearity		0.2	2	% FSR	Best fit straight line
Frequency Response	0		10	kHz	Upper cutoff per Option Bnnn, -3 dB pt ±10%
Noise Density		2.8		mg/√Hz	10 Hz to 400 Hz
Self-Test Input Impedance	10			kΩ	Pullup. Logic "1"≥3.5V, Logic "0"≤1.5V
Temperature Sensor					Accuracy ±1°C
Sensitivity		6.45		mV/°C	
0°C Bias Level		509		mV	
Outputs					
Output Voltage Swing	0.50		4.50	V	I _{out} = ±0.5 mA
Capacitive Drive Capability	1000			pF	
Power Supply (Vs)					
Input Voltage Limits	-80		+80	V	-80V continuous, >38 V if ≤550 ms, duty <1%
Input Voltage - Operating	+8.5		+36	V	Continuous
Input Current		15	20	mA	No load, quiescent
Rejection Ratio		>120		dB	DC
Temperature Range (Ta)	-40		+85	°C	
Mass		35		grams	Precise values on cal certificate
Shock Survival	-4000		+4000	g	Any axis for 0.5ms, powered or unpowered

MECHANICAL

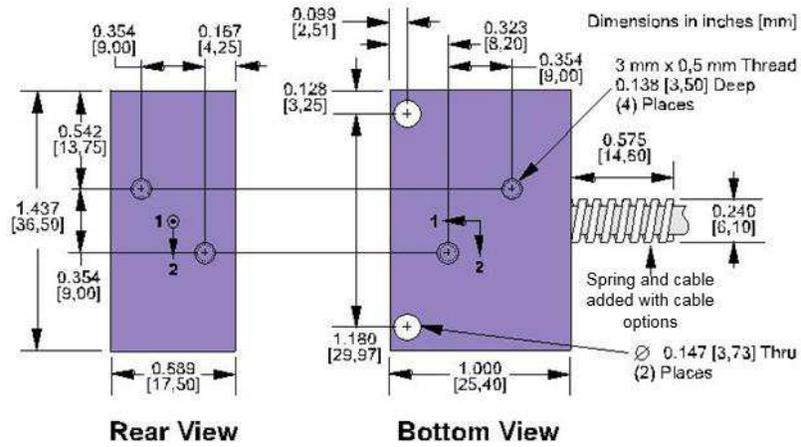



Two through holes and four 3 mm x 0.5 mm threaded holes are provided for mounting

Mounting adapters
 (sold separately)




35173A Horizontal 35172A Vertical

CONNECTIONS

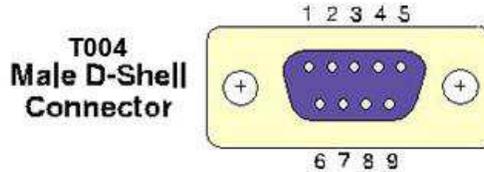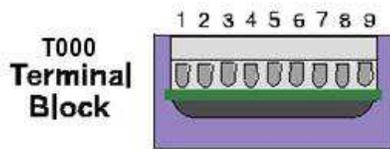

Pin	1	2	3	4	5	6	7	8	9
Signal	A2+	Signal-	T+	+5VOut	A1+	Signal-	Self Test	+Vs	Gnd
Wire	Brown	Red	Orange	Yellow	Green	Blue	Violet	Grey	White

ORDERING INFORMATION

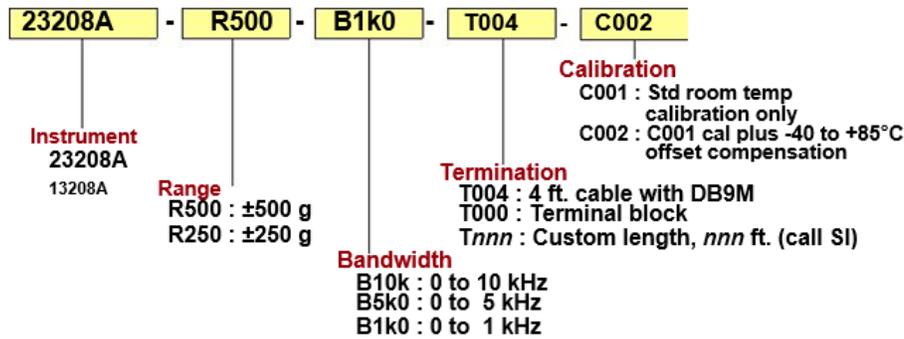

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
2236 N. Cleveland-Massillon Road
Akron, OH 44333
USA
Tel: +1-330-659-3312
Sales: pvg.cs.amer@meas-spec.com

EUROPE

MEAS France SAS
a TE Connectivity Company
26 Rue des Dames
F78340 Les Clayes-sous-Bois
France
Tel: +33 (0) 130 79 33 00
Fax: +33(0) 134 81 03 59
Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
Sales: pfg.cs.asia@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.