


# MODEL 3038 ACCELEROMETER



## dimensions

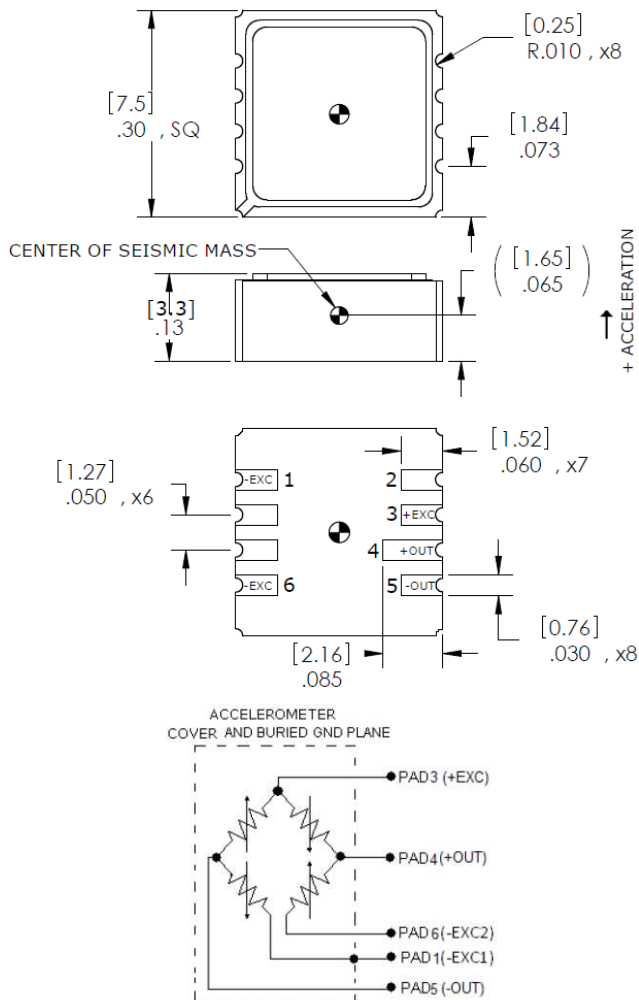

## SPECIFICATIONS

- Miniature Piezoresistive MEMS
- SMD Accelerometer
- Hermetically Sealed
- 10,000g Shock Protection

The Model 3038 is a hermetically sealed SMD accelerometer designed for high performance applications. The accelerometer incorporates a gas-damped piezoresistive MEMS sensing element providing outstanding long-term stability. The model 3038 provides a millivolt output signal and features mechanical overload stops that provide shock protection to loads greater than 10,000g.

## FEATURES

- $\pm 50g$  to  $\pm 6000g$  Dynamic Ranges
- Board Mountable Accelerometer
- Low Power Consumption
- Hermetic LCC Package
- DC Response, Gas Damping
- 5000Hz Bandwidth

## APPLICATIONS

- Harsh Environments
- Vibration & Shock Monitoring
- Impact Testing
- Embedded Applications
- Instrumentation
- Machinery

**US Patents 5,103,667; 5,253,510; 5,445,006 apply**

**PERFORMANCE SPECIFICATIONS**

All values are typical at +24°C, 80Hz and 5Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters							Notes
<b>DYNAMIC</b>							
Range (g)	±50	±100	±200	±500	±2000	±6000	
Sensitivity (mV/g) <sup>1</sup>	1.0	0.50	0.40	0.20	0.08	0.05	@5Vdc Excitation
Frequency Response (Hz)	0-1000	0-1200	0-1400	0-2000	0-4500	0-5000	±5%
Natural Frequency (Hz)	4000	6000	8000	15000	24000	26000	
Non-Linearity (%FSO)	±1	±1	±1	±1	±1	±2	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1 Typical
Damping Ratio	0.4-0.9	0.4-0.9	0.2-0.6	0.2-0.6	0.05-0.30	0.05-0.30	
Shock Limit (g) <sup>3</sup>	10000	10000	10000	10000	10000	10000	
<b>ELECTRICAL</b>							
Zero Acceleration Output (mV)	±25						Differential
Excitation Voltage (Vdc)	2 to 10						
Input Resistance (Ω)	2400-6500						
Output Resistance (Ω)	2400-6500						
Insulation Resistance (MΩ)	>100						@50Vdc
Residual Noise (µV RMS)	10						Maximum
Ground Isolation	Isolated from Mounting Surface						
<b>ENVIRONMENTAL</b>							
Thermal Zero Shift (%FSO/°C)	-0.09						Typical
Thermal Sensitivity Shift (%/°C)	-0.15						Typical
Operating Temperature (°C)	-55 to 125						
Compensated Temperature (°C)	Uncompensated						
Storage Temperature (°C)	-55 to 125						
Humidity	Hermetically Sealed						
<b>PHYSICAL</b>							
Case Material	Ceramic						
Weight (grams)	0.6						
Mounting	Solder						

<sup>1</sup> Output is ratiometric to excitation voltage. 10Vdc excitation will increase output by a factor of 2x.

<sup>2</sup> The maximum recommended soldering temperature is +260°C

<sup>3</sup> 10,000g shock limit in normal axis; 5,000g in transverse axes

**Calibration supplied:** CS-SENS-0100 NIST Traceable Amplitude Calibration at 100Hz and 5Vdc Excitation

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

## ORDERING INFO

PART NUMBERING    Model Number+Range

3038-GGGG-ZZ

  |   |   Options (otherwise leave blank)  
  |   |   Range (0100 is 100g)

Optional Dash Numbers

-01    10Vdc Calibration

Example: 3038-0100

Model 3038, 100g Range, No Options

### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1000 Lucas Way  
Hampton, VA 23666  
Sales and Customer Service  
Tel: +1-800-745-8008 or  
+1-757-766-1500  
Fax: +1-757-766-4297  
t&m@meas-spec.com

### EUROPE

MEAS France SAS  
a TE Connectivity Company  
26 Rue des Dames  
F78340 Les Clayes-sous-Bois  
France  
Sales and Customer Service  
Tel: +33 (0) 1 79 33 00  
Fax: +33(0)1 34 81 03 59  
t&m@meas-spec.com

### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Sales and Customer Service  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
t&m@meas-spec.com

### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.