


# 312 Cable Assembly



## DIMENSIONS

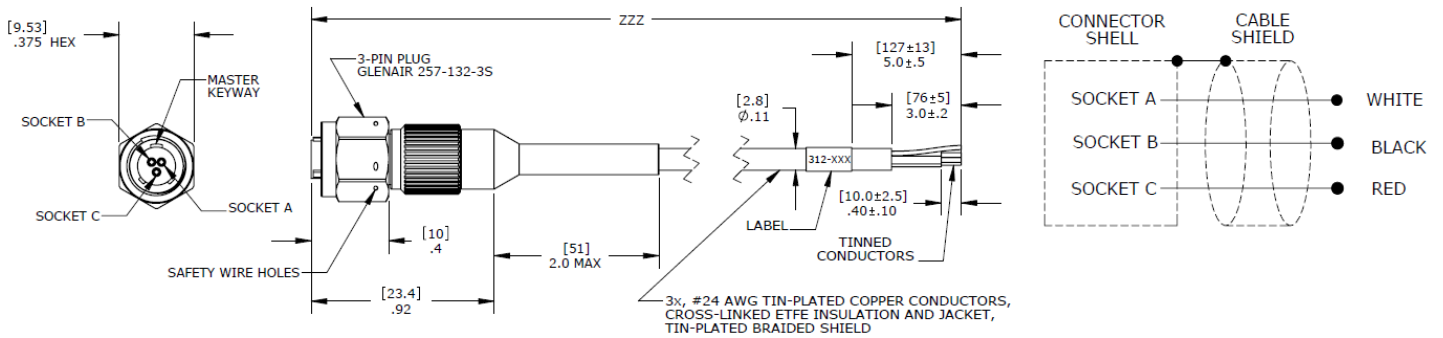

## DESCRIPTION

IEPE plug and play accelerometer cable assembly. Standard cable length is 120 inches. Cable features safety wire holes, #24 AWG tin-plated copper conductors and 3-pin Glenair plug. Mates with accelerometer Model 7204A.

## FEATURES

- Safety Wire Holes
- Cross-Linked ETFE Insulation and Jacket
- Tin-Plated Braided Shield
- #24 AWG Tin-Plated Copper Conductors
- 55°C to +150°C Temp Range

## APPLICATIONS

- Health Usage Monitoring Systems
- Flight Testing
- Gearbox Vibration Monitoring
- Harsh Environments
- High Frequency

## 312 Cable Assembly

---

### NORTH AMERICA

**Measurement Specialties, Inc.**

1000 Lucas Way  
Hampton, VA 23666  
USA

**Sales and Customer Service**

Tel: +1-800-745-8008 or  
+1-757-766-1500  
Fax: +1-757-766-4297  
[t&m@meas-spec.com](mailto:t&m@meas-spec.com)

### EUROPE

**Measurement Specialties  
(Europe), Ltd.**

26 Rue des Dames  
F78340 Les Clayes-sous-Bois  
France

**Sales and Customer Service**

Tel: +33 (0) 1 79 33 00  
Fax: +33(0)1 34 81 03 59  
[t&m@meas-spec.com](mailto:t&m@meas-spec.com)

### ASIA

**Measurement Specialties  
(China), Ltd.**

No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District

Shenzhen, China 518057

**Sales and Customer Service**

Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
[t&m@meas-spec.com](mailto:t&m@meas-spec.com)

---

### ORDERING CODE

---

312-ZZZ (-ZZZ designates length in inches, -120 standard)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.