




## DIMENSIONS

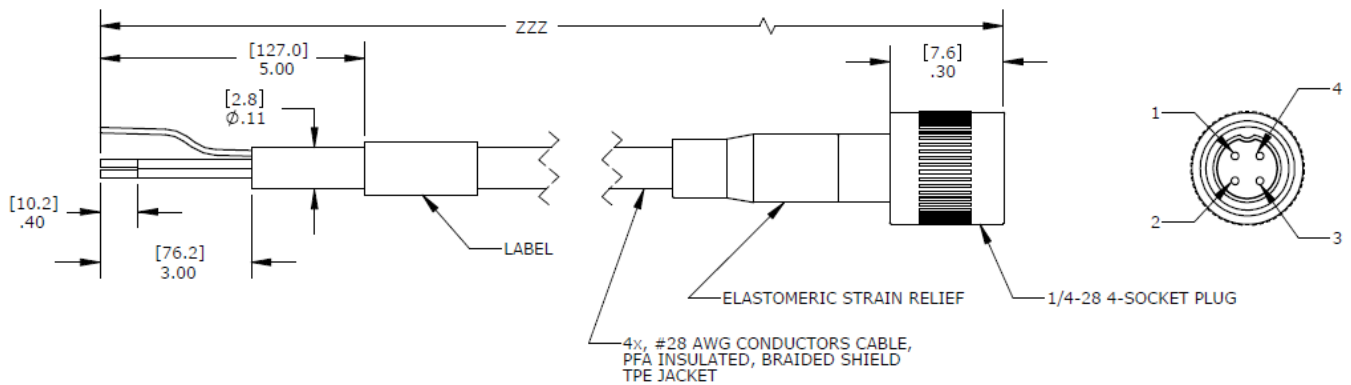

## DESCRIPTION

IEPE plug and play accelerometer cable assembly for triaxial accelerometers. Featuring 4-pin Microtech connector to pigtail leads. Standard cable length is 120 inches. Mates with accelerometer models 7131A, 7132A & 7134A.

## FEATURES

- TPE Jacket
- PFA Insulated #28 AWG Conductors
- SPC Braided Shield
- 4-Pin Microtech Connector
- 54°C to +125°C Temp Range

## APPLICATIONS

- IEPE Triaxial Accelerometers
- Laboratory Testing
- Vibration Monitoring
- General Purpose
- Model Testing

---

## ORDERING CODE

---

317-ZZZ (-ZZZ designates length in inches, -120 standard)

### NORTH AMERICA

**Measurement Specialties, Inc.**

1000 Lucas Way  
Hampton, VA 23666  
USA

**Sales and Customer Service**

Tel: +1-800-745-8008 or

+1-757-766-1500

Fax: +1-757-766-4297

[t&m@meas-spec.com](mailto:t&m@meas-spec.com)

### EUROPE

**Measurement Specialties  
(Europe) Ltd.**

26 Rue des Dames  
F78340 Les Clayes-sous-Bois  
France

**Sales and Customer Service**

Tel: +33 (0) 1 79 33 00

Fax: +33(0)1 34 81 03 59

[t&m@meas-spec.com](mailto:t&m@meas-spec.com)

### ASIA

**Measurement Specialties  
(China), Ltd.**

No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District  
Shenzhen, China 518057

**Sales and Customer Service**

Tel: +86 755 3330 5088

Fax: +86 755 3330 5099

[t&m@meas-spec.com](mailto:t&m@meas-spec.com)

---

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.