DRAW WIRE SENSOR

"Small size, High strength stainless steel wire"

AWP 110

GENERAL FEATURES

- Different stroke (measuring) lengths between 0…100 mm and 0…1200 mm
- ±0.5% FS linearity
- Potentiometric, 0-10 VDC or 4-20 mA analog output options
- Stainless steel measuring wire
- Small structure
- IP53 protection class
- Compact design
- Easy installation
- Shock/Vibration resistant
- Aluminum anodized body

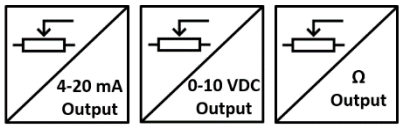

AWP 110 series draw wire sensors; consists of a rotary potentiometer which is controled by stainless steel wire. They make measurement by pulling and rewinding stainless steel wire. Different stroke lengths between 0…100 mm and 0…1200 mm are available. They converts linear motion to potentiometric output.

The "A" series, works with 24VDC supply and gives of 4-20 mA analog output with the help of the converter card.

The "V" series, works with 24VDC supply and gives of 0-10 VDC analog output with the help of the converter card.
Optionally, different non-standard measuring lengths, cable length or socket model can be requested.

TECHNICAL SPECIFICATIONS

***Stroke (measuring) Length**	Different measuring lengths between 0…100 mm and 0…1200 mm
***Connection Cable Length**	3m (standard), 5m, 10m
***Supply Voltage**	'A' and 'V' models: 12…30 VDC
	Potentiometric output model: 42V max.
***Output Signals**	Potentiometric 0-10 VDC 4-20 mA
Linearity	±0.5% FS
Maximum Speed	0.5 m/s

Required Force	5 N
***Resistance**	5 KΩ (standard), 10 KΩ
Measuring Type	Potentiometric
Materials	Housing: Aluminum/steel/plastic
	Measuring Wire: Stainless steel
IP Protection Class	IP53
Operating Temperature	-25°C … +85°C
Relative Humudity	%95
Weight	≈550 gr

Note: The technical specifications indicated by (*) vary according to the selected model. The detailed code table is shown on page 3.

ELECTRICAL CONNECTION

Never make or undo electrical connections to the sensor when voltage is applied, otherwise this may result in damage to devices.

0-10V or POTENTIOMETER Connection		
Signal	**Cable Color**	**M12 5 pin male socket**
Earth	Silver	Pin 1
+V	Red	Pin 2
0V	Black	Pin 3
0-10V / Pot	Yellow	Pin 4
-	-	Pin 5

4-20 mA Connection		
Signal	**Cable Color**	**M12 5 pin male socket**
Earth	Silver	Pin 1
+V	Red	Pin 2
-	-	Pin 3
4-20 mA	Yellow	Pin 4
-	-	Pin 5



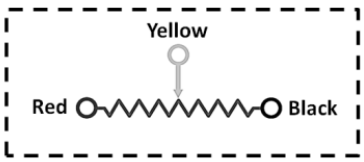

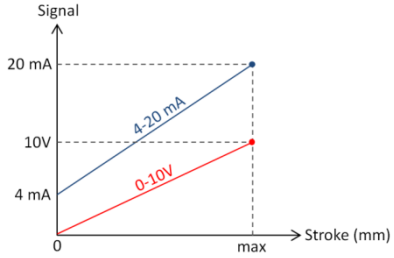

DIMENSIONS

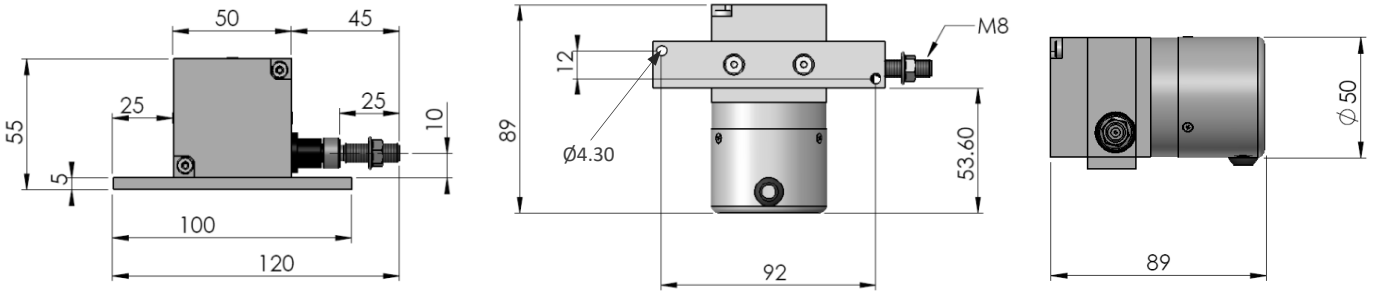

MOUNTING AND WARNINGS

1. Never release the wire after pulling. Otherwise, the coil spring will be damaged.

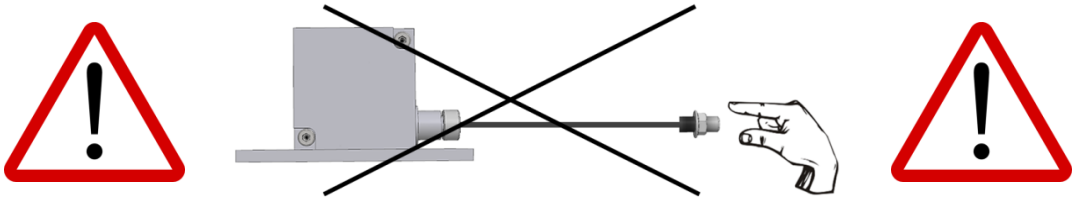

2. Mount the sensor according to the mounting directions shown below.

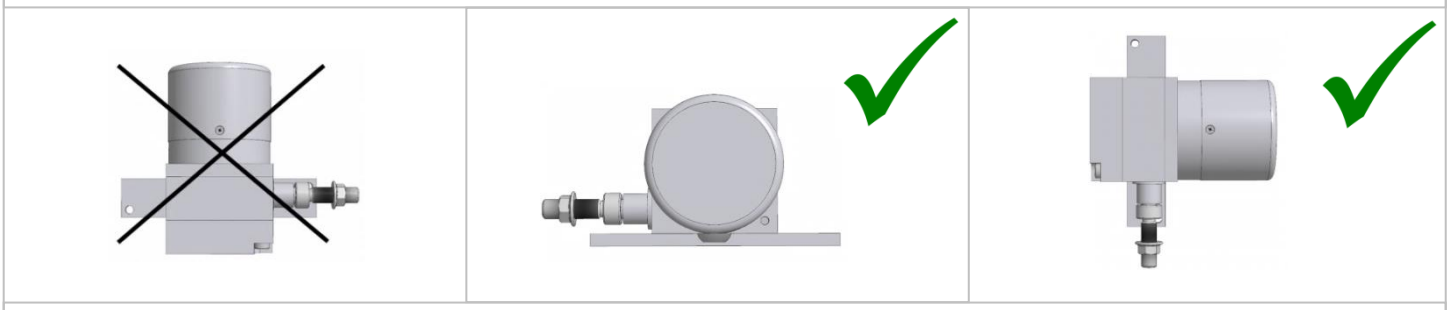

3. If there is a trickle of water (like a rain), the wire outlet must not be a drip of water upstream. If needed please use guide rollers.

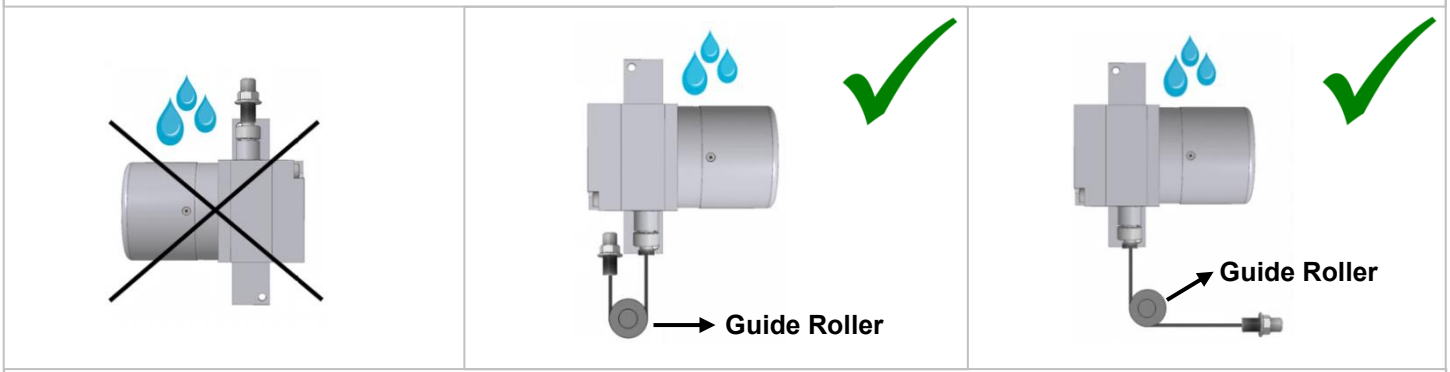

4. The wire should not be pulled in angular. If needed, please use guide rollers.

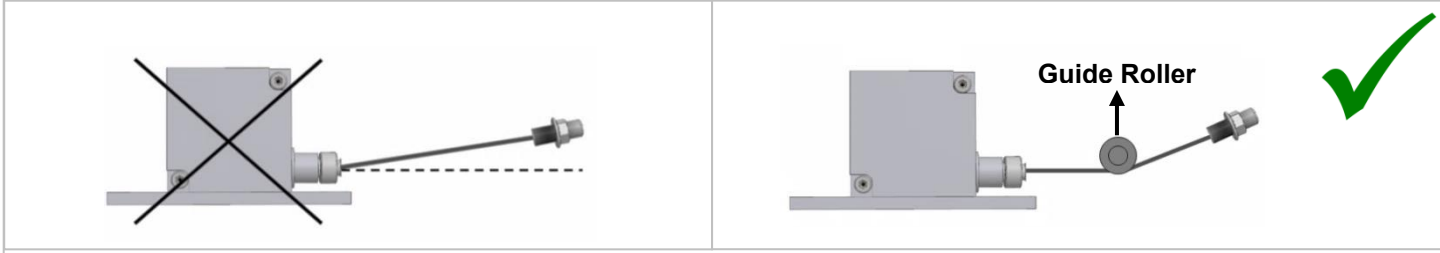

Important Note(!): Failure to comply with these recommendations, the malfunctions that may occur will not be under the warranty.

SAMPLE APPLICATION FIELDS

- Elevators
- Press machines
- Crane systems
- Wood processing machines
- Marble processing machines
- Storage positioning
- Dam protections
- Sluice gate control
- Air compressors
- Glass processing machines
- Lifting platforms
- Applications in medical technologies (operating table etc.)
- Forklifts
- Screw machines
- Paper machines
- Sewing machines
- Hydraulic machines
- Sheet metal machines
- Printing machines
- Horizontal control equipments
- Construction machines
- Industrial robots
- Injection machines
- X-Y axis displacement
- Liquid level measurements and position control

PRODUCT CODE

Model
AWP 110

Resistance (2)
No Code: Analog output
5K: 5 KΩ (standard)
10K: 10 KΩ

Output Signals
No Code : Potentiometric
V : 0-10 VDC
A : 4-20 mA

AWP 110	–	XXX	–	XXX	–	X	–	X

Stroke Length (1)
Different stroke (measuring) lengths between 0…100 mm and 0…1200 mm

Electrical Connection (3)
3M : 3 m cable
5M : 5 m cable
10M : 10 m cable
S13 : M12 5 pin male socket

(1) For other (special production) stroke lengths, please contact us.
(2) For products with analog output, resistance value is not selected. Please contact for other resistance options for potentiometric output products.
(3) Product can be requested with cable or socket. Please contact us for other cable length and socket model requests.

Sample Code 1 (Potentiometric output) : AWP-110-300-5K-S13
AWP 110 series, 300 mm stroke, 5K resistance, 1 pcs M12 5 pin male socket, potentiometric output

Sample Code 2 (Analog output) : AWP-110-300-3M-V
AWP 110 series, 300 mm stroke, 3 meters cable output, voltage output

Atek Elektronik Sensör Teknolojileri Sanayi ve Ticaret A.Ş.

Gebze OSB, 800. Sokak, No:814 Gebze/KOCAELİ/TÜRKİYE
Tel: +90 262 673 76 00
Fax: +90 262 673 76 08
www.ateksensor.com
info@ateksensor.com

DISTRIBUTOR / DISTRIBUIDOR

Brazil and South America / Brasil e América do Sul

www.metrolog.net

Metrolog Controles de Medição

Address / Endereço:

Rua Sete de Setembro, 2656
13560-181 - São Carlos - SP
Brazil / Brasil

Phone / Telefone:

+55 (16) 3371-0112
+55 (16) 3372-7800

Internet:

www.metrolog.net
metrolog@metrolog.net