

E2-SERIES INCLINOMETER

SPECIFICATIONS

- **Dual axis inclinometer**
- **Measurement range $\pm 5^\circ$, $\pm 10^\circ$, $\pm 15^\circ$ or $\pm 45^\circ$**
- **Analogue voltage output signal**
- **OEM module**

The **E2- series** is a biaxial inclination sensor as a pcb module for OEM use with measurement range $\pm 5^\circ$, $\pm 10^\circ$, $\pm 15^\circ$ or $\pm 45^\circ$. It consist of two basic inclination sensor cells based on a conductance measurement principle and their complete electronic biasing and readout, which is carefully designed in order to minimize drift and temperature effects.

FEATURES

- High resolution
- Analogue voltage output signal
- Easy for mounting
- PCB level
- Fast response time
- Low drift sensitivity
- Low noise level

APPLICATIONS


- Road construction machines
- Vehicle applications
- Building control
- Mobile and stationary cranes
- Hydraulic leveling
- Platform leveling
- Drilling machines

PERFORMANCE SPECIFICATIONS

	Conditions	Min	Type	Max	Unit
Measurement range (1)		-5 , -10, -15, -45		+5, +10, +15, +45	°
Resolution (2)		0.001		0.01	°
Accuracy (3)	Ta = 0°...70°C,	0.08 , 0.11 , 0.15 , 0.9			°
Non-linearity		1.5			%[FS]
Cross sensitivity		0.15			%[FS]
Voltage output signal(4)	5°,15° unit	-2		+2	V
Voltage output signal(4)	5°,15° unit	0.5		4.5	V
Voltage output signal(4)	10°,45°unit	-2.2		+2.2	V
Voltage output signal(4)	10°, 45°unit	0.3		4.7	V
Current consumption		9			mA
Power supply		+12		+24	VDC
Operation temperature range		0		+70	°C
Storage temperature range		-40		+85	°C
Weight		20			g
Dimensions (5)	W x D x H	45 x 45 x 14(20)			mm

- (1) Measurement ranges +/-5°, +/-10°, +/-15°, +/-45° available
- (2),(3) Depend on measurement range
- (4) Depending on the circuitry wiring, see pinning schema
- (5) Dimensions 45 x 45 x 20 mm , valid for the NS-45/E2


DIMENSIONS [MM]

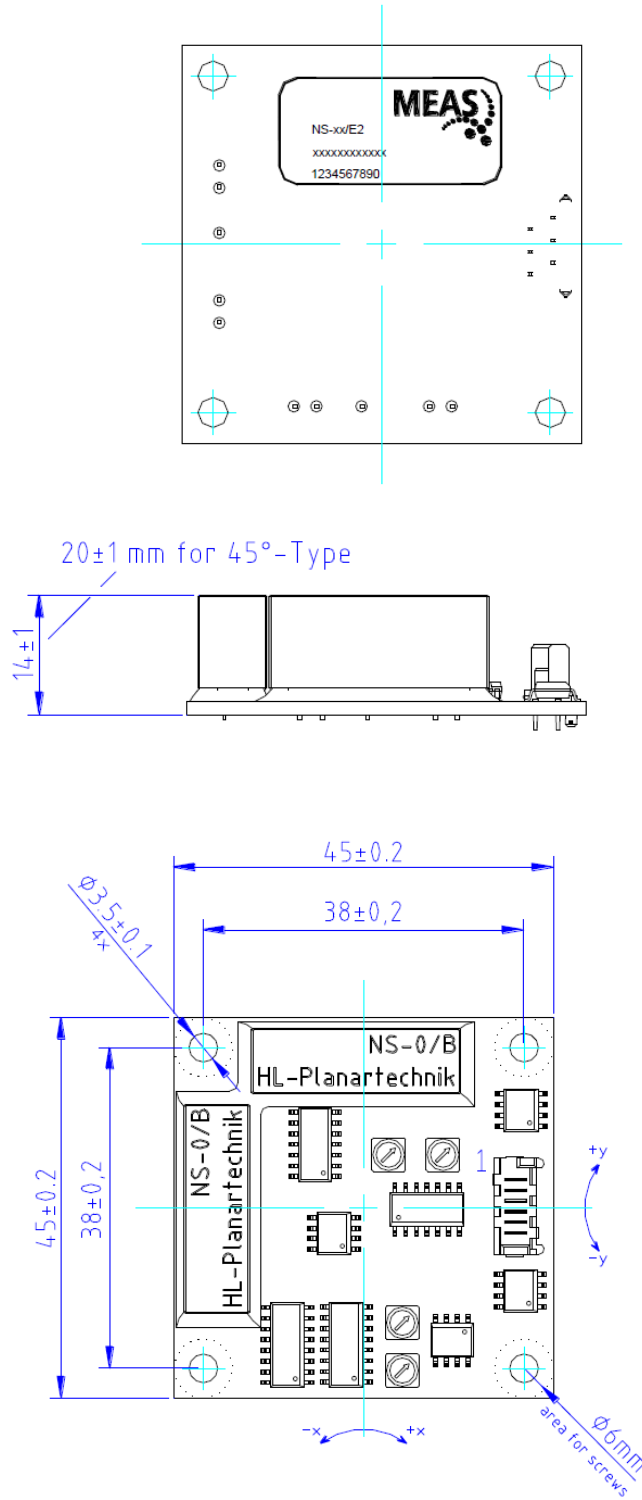

PINNING



Pin	Name	Description	Type
1	Vcc	Positive power supply +12...+24VDC	Supply, Input
2	Vref	Reference potential +2.5VDC, S-GND ⁽¹⁾	Supply, Input
3	GND	Ground, negative supply voltage ⁽²⁾	Supply, Input
4	Out X	Output voltage signal X axis	Output
5	Out Y	Output voltage signal Y axis	Output
6	n.c.	n.c.	-

- (1) If output signal will be used of +/- 2 V (unit: 5°,15°) alternatively +/- 2.2 V (unit: 10°,45°)
- (2) If output signal will be used of 0.5...4.5 V (unit: 5°,15°) alternatively 0.3...4.7 V (unit: 10°,45°)

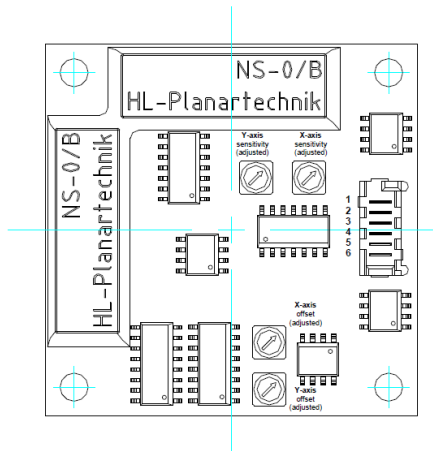


Pinning Vout x,y in reference to Vref.: +2.5VDC

Pinning Vout x,y in reference to GND

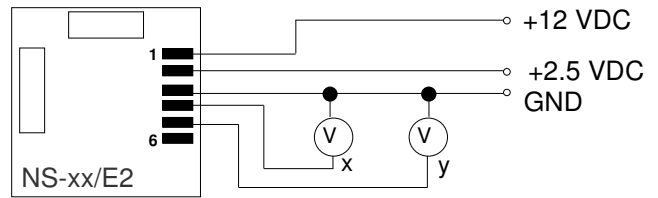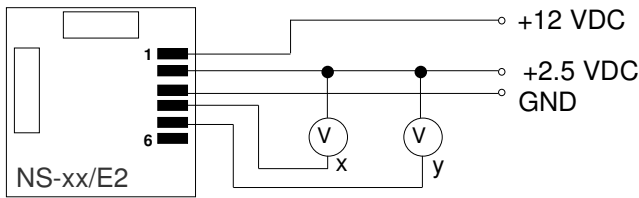

All connecting configurations need the Vref: +2.5 VDC power supply signal.

MOUNTING

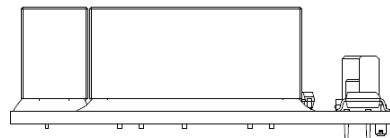

This kind of unit is for horizontal mounting suitable only.

ORDERING INFORMATION

PART NUMBERING	UNIT	SHORT DESCRIPTION
G-NSE2-003	NS- 5/E2	dual axis, +/- 5° angle, Vcc: +12...24VDC, output V
G-NSE2-004	NS-10/E2	dual axis, +/-10° angle, Vcc: +12...24VDC, output V
G-NSE2-010	NS-15/E2	dual axis, +/-15° angle, Vcc: +12...24VDC, output V
G-NSE2-020	NS-45/E2	dual axis, +/-45° angle, Vcc: +12...24VDC, output V
G-NSMIS-014	Connector, cable	6- pin Molex-Connector with 20cm ribbon cable

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
1000 Lucas Way
Hampton, VA 23666
United States
Phone: +1-800-745-8008
Fax: +1-757-766-4297
Email: sales@meas-spec.com

EUROPE

MEAS Deutschland GmbH (Europe)
a TE Connectivity Company
Hauert 13
D-44227 Dortmund
Germany
Phone: +49-(0)231-9740-0
Fax: +49-(0)231-9740-20
Email: info.de@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Phone: +86-755-33305088
Fax: +86-755-33305099
Email: info.cn@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.