



ED-20

Quadrature Output Series Magnetic Encoder

SPECIFICATIONS

- High or low profile differential or NPN outputs
- Wide operational temperature range
- IP52 sealing
- Ball bearing

The ED-20 series magnetic encoder is designed for medium duty industrial feedback applications with ball bearing supported shaft. Resolutions are available from 200 to 400 counts per revolution.

This encoder series also features line drivers with active termination for long cable runs as well as reverse voltage protection.

The ED-20 also offers the option of high voltage differential, low voltage differential or open collector (NPN) outputs. An index channel drives a pulse every 180°.

The magnetic technology used in the ED-20 series offers many advantages over conventional optical encoder technology such as sealed electronics and extended temperature ranges. Furthermore, since there are no LED/LD degradation issues, the ED-20 has a virtually unlimited life.

FEATURES

- Magnetic sensing technology
- Encapsulated electronics/sealed unit
- Harsh environment compatibility
- Quadrature outputs
- High or low profile differential or NPN outputs
- Consistent rotational torque
- Resistant to contamination
- IP52 sealing
- Metallic threaded bushing mounting
- Excellent stability – no optical degradation

APPLICATIONS

- Marine, avionics, motor speed and position control
- Marine steering
- Monitor pump speed and direction
- Camera position and control
- XY stage positioning
- Motor feedback
- Medical diagnostic equipment
- Video and sound editing equipment
- Valve position
- Syringe pump

PERFORMANCE SPECS (NOTE1)

Low and high voltage differential output:

Parameters	ED-20-LVD-XXXX-Q-P	ED-20-HVD-XXXX-Q-P
Supply current	25 mA	25 mA
Operating voltage (Vcc)	5 VDC \pm 0.25 VDC	12 VDC to 32 VDC
Voltage output high	Vcc – 0.4 V	
Voltage output low	400 mV	
Duty circle	50% \pm 25%	
Standard resolutions	400, 200 counts per revolution (4 counts = 1 pulse)	
Operating temperature	-40 °C to 85 °C	

NPN open collector output:

Parameters	ED-20-NPN-XXXX-Q-P
Supply current	15 mA
Operating voltage (Vcc)	5 VDC \pm 0.25 VDC
Voltage output high	Vcc – 0.4 V
Voltage output low	125 mV
Duty circle	50% \pm 25%
Standard resolutions	400, 200 counts per revolution (4 counts = 1 pulse)
Operating temperature	-40 °C to 85 °C

Bearing:

Parameters	ED-20-XXX-XXXX-Q-P
Bearings	Ball
Maximum speed	3000 RPM
Bearing life	30,000,000 cycles

(NOTE1): Vcc = 5 V | 24 V, Ambient Temperature 25 °C

MECHANICAL

Parameters	ED-20-XXX-XXXX-Q-P
Axial load (max.)	20 N
Radial load (max.)	10 N
Shaft end play axial (max.)	0.13 mm
Shaft radial play (max.)	0.25 mm (15.3 mm from thread)
Shaft push-in force	9 N
Shaft pull-out force	1.3 N
Run out (max.)	0.25 mm (19 mm from thread)
Bushing mounting torque	1.1 Nm

DIMENSIONS

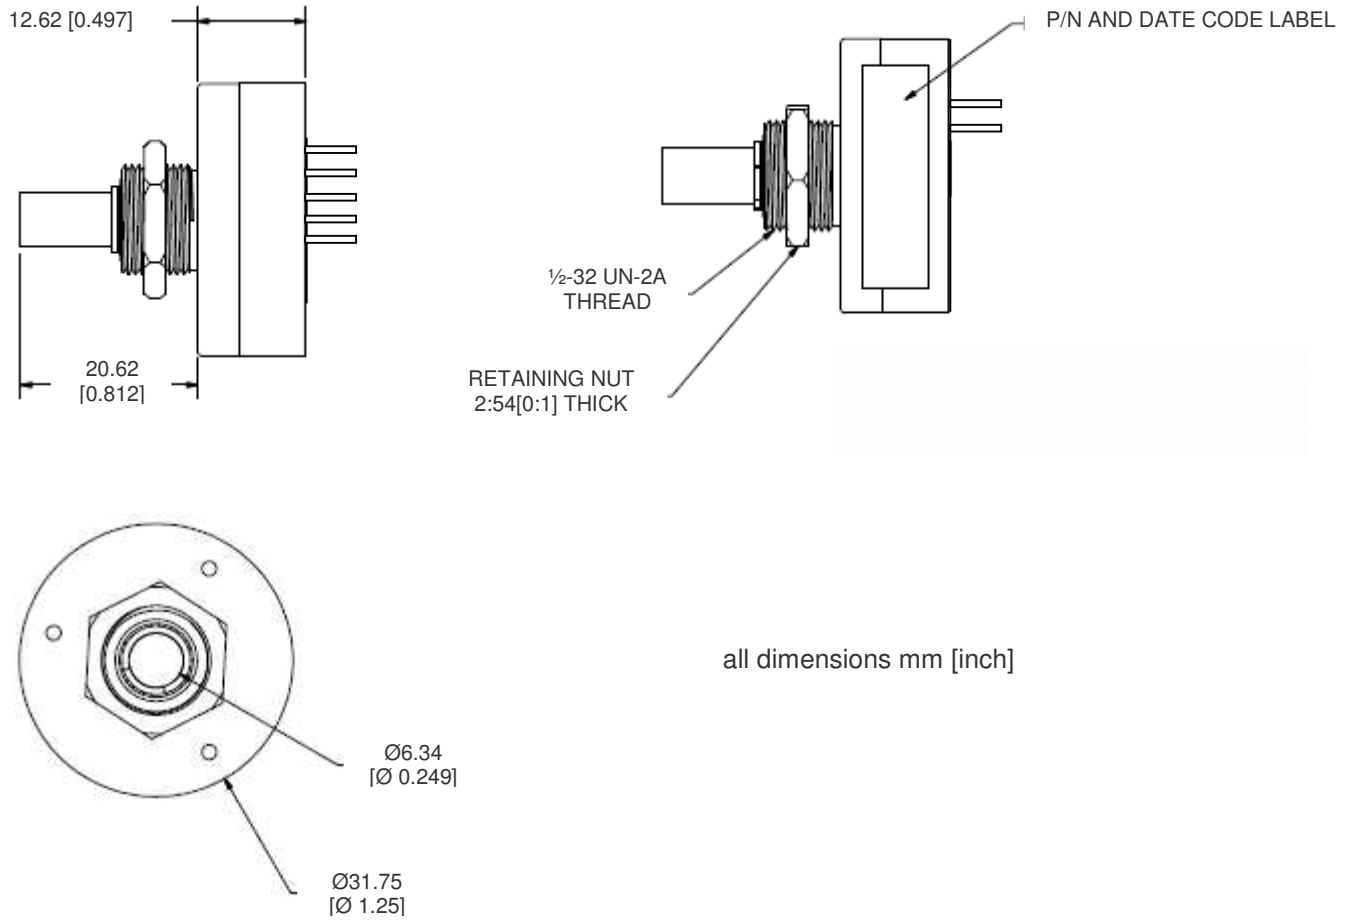


Figure 1: Dimensions of the ED-20

PINNING

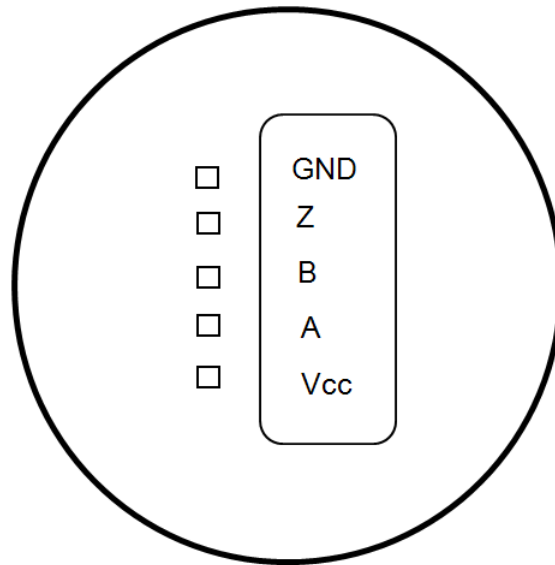


Figure 2: Pinning of the ED-20 (NPN)

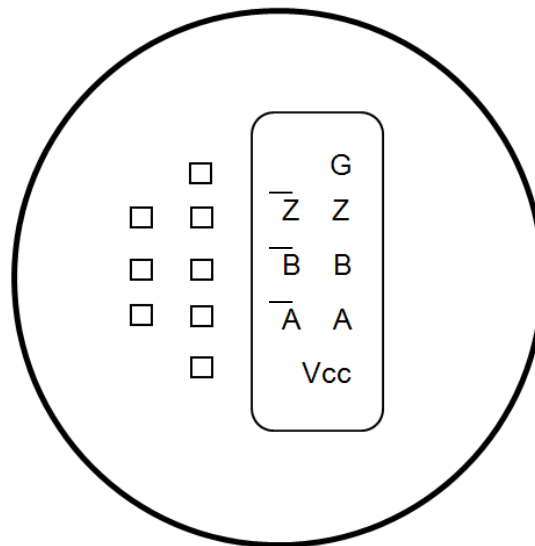


Figure 3: Pinning of the ED-20 (HVD and LVD)

TYPICAL PERFORMANCE CURVES

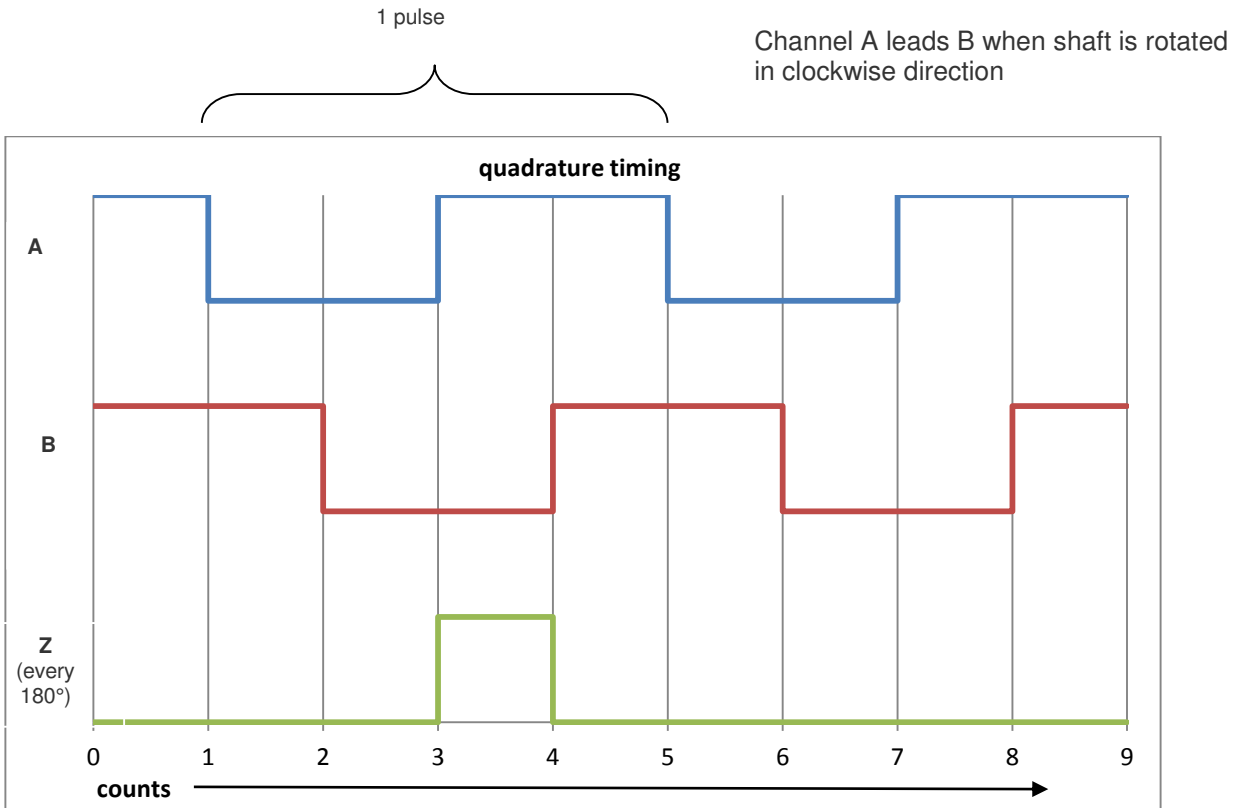



Figure 4: quadrature outputs

ENVIRONMENTAL

Vibration	MIL-STD-202F Method 204D Test Condition B
Shock	MIL-STD-202F Method 213B Test Condition C
Humidity	MIL-STD-202F Method 103B Test Condition A
Thermal Shock	MIL-STD-202F Method 107G Test Condition A
Operating Temperature	-40 to 85°C
Storage Temperature	-55 to 125°C

ORDERING INFORMATION

PART NUMBERING Model Number - Output - Range – Output type - Connection

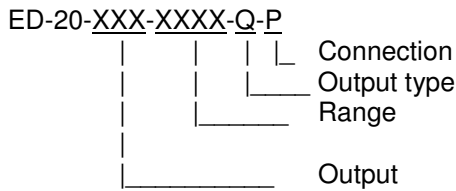

Options:
 P = Pin header
 Q = Quadrature
 0200 = 200 counts per revolution
 0400 = 400 counts per revolution
 HVD = high voltage differential
 LVD = low voltage differential
 NPN = open collector

Example: ED-20-NPN-0400-Q-P

Model ED-20, quadrature output with open collector, 400 counts per revolution, pin header

NORTH AMERICA

Measurement Specialties, Inc.,
 a TE Connectivity Company
 1000 Lucas Way
 Hampton, VA 23666
 United States
 Phone: +1-800-745-8008
 Fax: +1-757-766-4297
 Email: sales@meas-spec.com

EUROPE

MEAS Deutschland GmbH (Europe)
 a TE Connectivity Company
 Hauert 13
 D-44227 Dortmund
 Germany
 Phone: +49-(0)231-9740-0
 Fax: +49-(0)231-9740-20
 Email: info.de@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
 a TE Connectivity Company
 No. 26, Langshan Road
 High-tech Park (North)
 Nanshan District, Shenzhen 518057
 China
 Phone: +86-755-33305088
 Fax: +86-755-33305099
 Email: info.cn@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

DISTRIBUTOR / DISTRIBUIDOR

Brazil and South America / Brasil e América do Sul



Address / Endereço:

Rua Sete de Setembro, 2656
13560-181 - São Carlos - SP
Brazil / Brasil

Phone / Telefone:

+55 (16) 3371-0112
+55 (16) 3372-7800

Internet:

www.metrolog.net
metrolog@metrolog.net

www.metrolog.net