



## ED-21

### Analog Output Series Magnetic Encoder

#### SPECIFICATIONS

- **Analog voltage or current output**
- **Low profile**
- **IP52 sealing**
- **Ball bearing**

The ED-21 series magnetic encoder is designed to replace traditional mechanical potentiometers.

This product is offered with a ball bearing supported shaft.

Two standard output options are available: 0.5 VDC to 4.5 VDC or 4 mA to 20 mA.

The magnetic technology used in the ED-21 offers advantages over conventional electromechanical potentiometers with sealed electronics, extended temperature ranges, and virtually unlimited life as there are no mechanical parts to wear out.

#### FEATURES

- Magnetic sensing technology
- Encapsulated electronics/sealed
- Harsh environment compatibility
- Analog voltage or current outputs
- Low profile
- Consistent torque
- Resistant to contamination
- Excellent stability
- Metallic threaded bushing mounting
- Wide operational temperature range (-40 °C to 85 °C)
- IP52 sealing

#### APPLICATIONS

- Potentiometer replacement
- Valve position
- Monitor pump speed and direction
- Camera position and control
- XY stage positioning
- Radio controls
- Motor feedback
- Medical diagnostic equipment
- Video and sound editing equipment
- Syringe pump
- Marine, avionics, motor speed and position control
- Marine steering

## PERFORMANCE SPECS (NOTE1)

Analog voltage output:

Parameters	ED-21-BB-0545-V-P
Standard output range 0 - 360°	0.5 VDC to 4.5 VDC
Supply current	15 mA
Operating voltage (Vcc)	5 VDC
Resolution	1.4°
Accuracy	2.8°
Operating temperature	-40 °C to 85 °C

Analog current output:

Parameters	ED-21-BB-0420-I-P
Standard output range 0 - 360°	4.0 mA to 20.0 mA
Supply Current	15 mA + output current loop
Operating voltage (Vcc)	8 VDC to 26 VDC
Resolution	1.4°
Accuracy	2.8°
Operating temperature	-40°C to 85 °C

Bearing:

Parameters	ED-21-BB-XXXX-X-P
Bearings	Ball
Maximum speed	3000 RPM
Bearing life	30,000,000 cycles

(NOTE1): Vcc = 5 V | 12 V, Ambient Temperature 25 °C

## MECHANICAL

Parameters	ED-21-BB-XXXX-X-P
Axial load (max.)	20 N
Radial load (max.)	10 N
Shaft end play axial (max.)	0.13 mm
Shaft radial play (max.)	0.25 mm (15.3 mm from thread)
Shaft push-in force	9 N
Shaft pull-out force	1.3 N
Run out (max.)	0.25 mm (19 mm from thread)
Bushing mounting torque	1.1 Nm

## DIMENSIONS

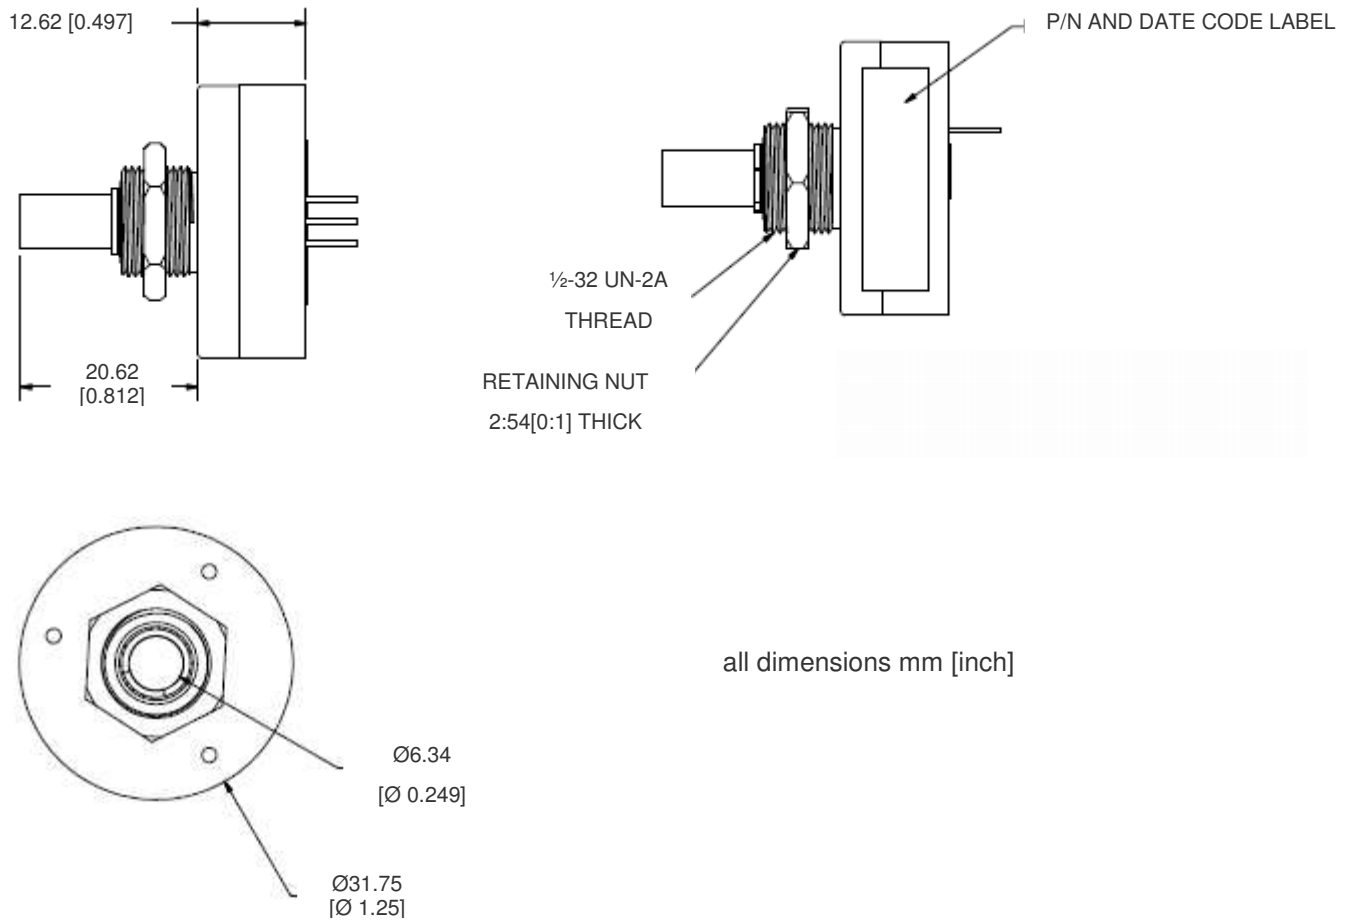


Figure 1: Dimensions of the ED-21

## PINNING




Figure 2: Pinning of the ED-21 (bottom view)

### TYPICAL PERFORMANCE CURVES

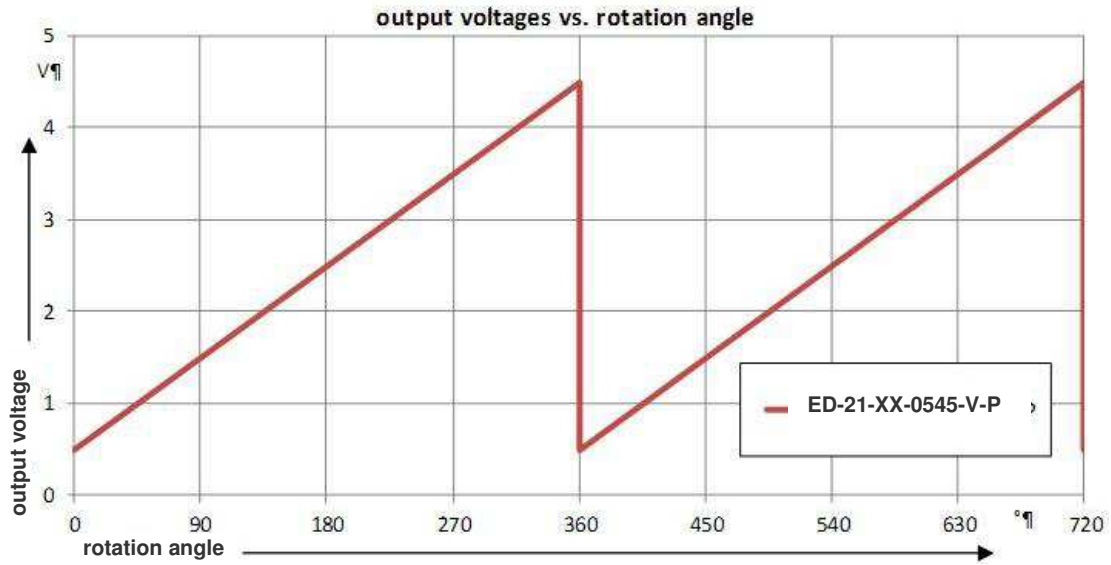


Figure 3: Output voltage vs. rotation angle

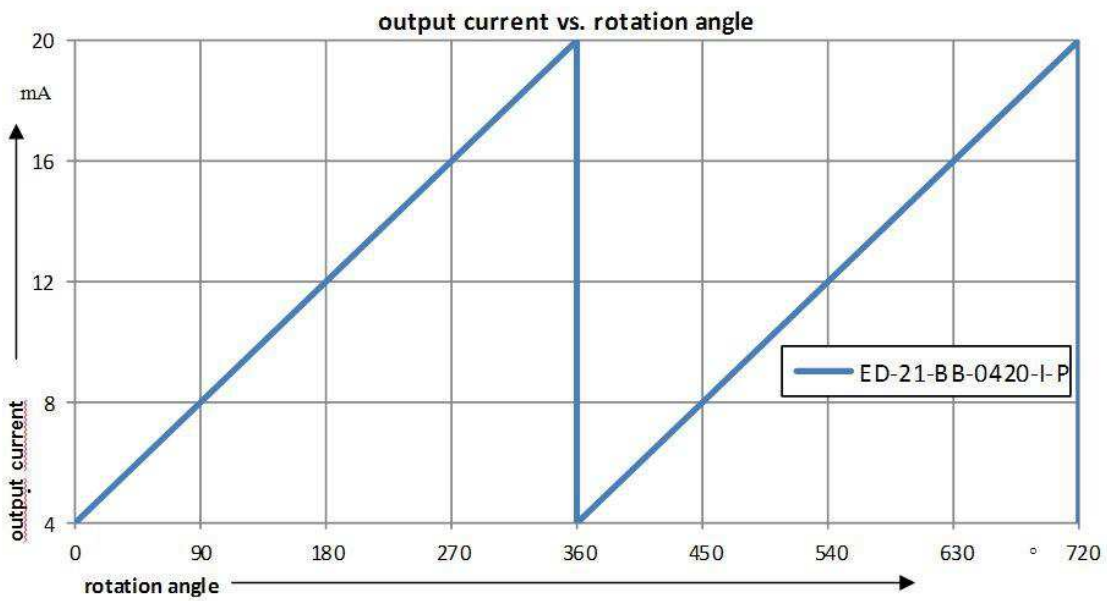


Figure 2: Output current vs. rotational angle


**ENVIRONMENTAL**

Vibration	MIL-STD-202F Method 204D Test Condition B
Shock	MIL-STD-202F Method 213B Test Condition C
Humidity	MIL-STD-202F Method 103B Test Condition A
Thermal Shock	MIL-STD-202F Method 107G Test Condition A
Operating Temperature	-40 to 85°C
Storage Temperature	-55 to 125°C

**ORDERING INFORMATION**

**PART NUMBERING** Model Number - Bearing - Output Range - Analog Output - Connection - Assembly Variant

ED-21-BB-XXXX-X-P



Connection  
Analog Output  
Output Range  
Bearing

Options:

P = Pin header  
V = Voltage  
I = Current  
0545 = 0.5 VDC to 4.5 VDC  
0420 = 4 mA to 20 mA  
BB = Ball bearing

Example: ED-21-BB-0545-V-P

Model ED-21, ball bearing, analog output voltage from 0.5 VDC to 4.5 VDC, pin header

**NORTH AMERICA**

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1000 Lucas Way  
Hampton, VA 23666  
United States  
Phone: +1-800-745-8008  
Fax: +1-757-766-4297  
Email: sales@meas-spec.com

**EUROPE**

MEAS Deutschland GmbH (Europe)  
a TE Connectivity Company  
Hauert 13  
D-44227 Dortmund  
Germany  
Phone: +49-(0)231-9740-0  
Fax: +49-(0)231-9740-20  
Email: info.de@meas-spec.com

**ASIA**

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26, Langshan Road  
High-tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Phone: +86-755-33305088  
Fax: +86-755-33305099  
Email: info.cn@meas-spec.com

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.