



## G-SERIES INCLINOMETER

### SPECIFICATIONS

Single axis inclinometer

Measurement range +/-10°

Switch output

Wall mounting

### FEATURES


- Robust housing
- High accuracy
- Protection class IP 67
- Wall mounted
- Simple clamp
- EMC Protection

### APPLICATIONS

- Building construction machines
- Building control
- Mobile and stationary cranes
- Forklift
- Alarm switch

The **G-Series** consist of a single axis conductive tilt sensor on a modern technology in environmentally protected and robust aluminum housing for wall mounting. The fast microcontroller works with a linearization and temperature compensation routines. This fully calibrated inclinometer offers a switch output signals. The inclination switch enables the angle of inclination of objects such as appliances, machines or motor vehicles to be monitored and emits an alarm signal when the angle is exceeded. The switch threshold can be set symmetrically by the customer in a range of +/-10°.



Dimensions [mm]

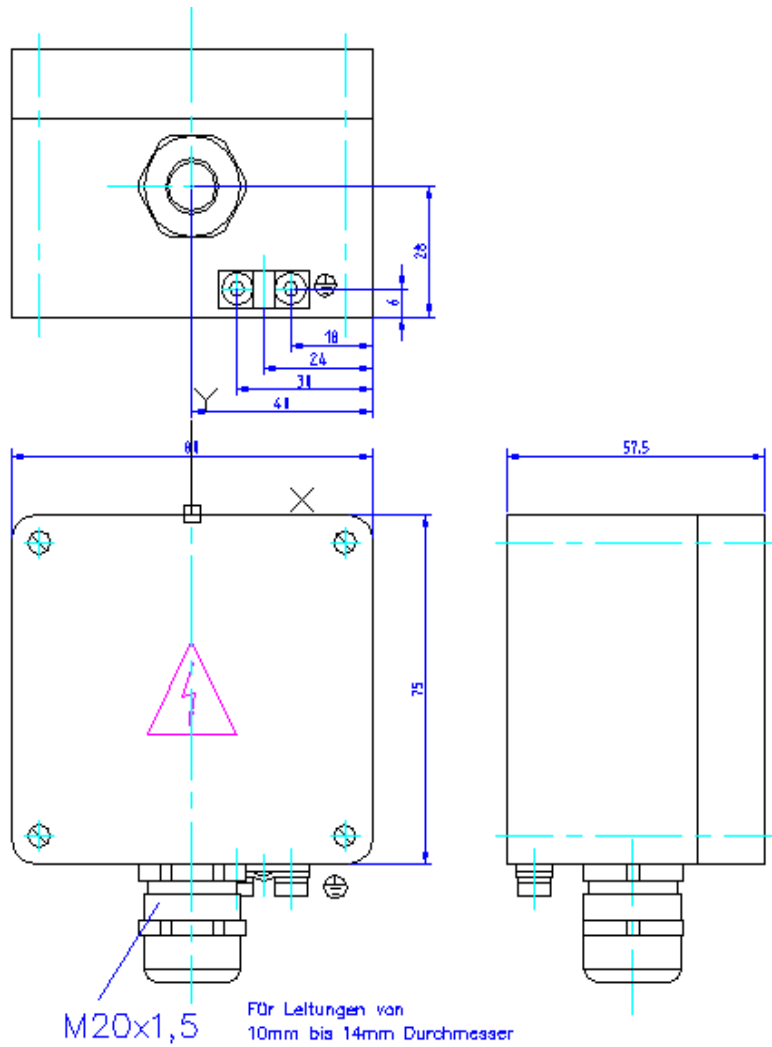

**PARAMETERS**

	Conditions	Min	Typ	Max	Units
Measurement range		-10		+10	°
Resolution			0.001		°
Switch threshold adjustable	Single step 0.1	0.1		9.9	°
Precision	T=25°C	-0.1		+0.1	°
Precision (absolute)	T=-25 to +85°C	-0.25		+0.25	°
Switch output	load		10	50	mA
Switch voltage		+0.1		+140	VDC
Switch hysteresis		0.05		0.15	°
Terminal strip		0.08		2.5	mm <sup>2</sup>
metric screw	Diameter M20, cable ø	8		12	mm
Voltage supply		+14.4		+30	VDC
Current consumption			15	20	mA
Operating temperature		-25		+85	°C
Storage temperature		-40		+85	°C
Protection class IP			67		IP
Weight			380		g
Dimensions	W x D x H		80 x 57 x 75		mm

**PINNING:**



For more details please use the product specification / application note / instruction manual.

### ORDERING INFORMATION

PART NUMBERING	UNIT	SHORT DESCRIPTION
G-NSG-001	NS-10/G	single axis, range +/-10°, Vcc 14.4...30VDC, switch output

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1000 Lucas Way  
Hampton, VA 23666  
United States  
Phone: +1-800-745-8008  
Fax: +1-757-766-4297  
Email: sales@meas-spec.com

#### EUROPE

MEAS Deutschland GmbH (Europe)  
a TE Connectivity Company  
Hauert 13  
D-44227 Dortmund  
Germany  
Phone: +49-(0)231-9740-0  
Fax: +49-(0)231-9740-20  
Email: info.de@meas-spec.com

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Phone: +86-755-33305088  
Fax: +86-755-33305099  
Email: info.cn@meas-spec.com

#### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.