

## ABOUT GAGE HEADS

Gage Heads, also called Gaging Probes, are spring or air actuated position sensors (LVDTs) with hard contact tips. TE Connectivity offers a full range of Gage Heads as well as signal conditioners and many other types of sensors. Data sheets, application notes and manuals can be downloaded from our web site at: <http://www.te.com/usa-en/products/sensors.html>.



## CONNECTORS FOR GAGE HEADS WITH CABLE (LBB AND PCA SERIES)

Four different connectors can be installed at the factory to simplify your installation of LBB and PCA Series gage heads. To select the proper connector, simply add the appropriate part number suffix to the end of the gage head part number. If you prefer to install the connector yourself, you can order it with the part numbers provided in the table below:

Suffix for factory installed connector	Connector Description	Connector part number for customer installation
-001	Bendix-type PTO6A-10-6P (SR)	62101056-000
-004	DE-9P compatible with ATA2001	04290454-000
-005	Switchcraft-type 12CL5-M compatible with SYS-96 Dimensional Data Acquisition System	
-007	Switchcraft-type 05BL5-M compatible with MP series LVDT readout/controller	



## MATING CONNECTOR AND EXTENSION CABLES FOR GC SERIES GAGE HEADS

There is only one connector mating plug for our gage heads equipped with integral connector (GCA, GCD, GCD-SE, GCT, and GC485):

**Description: Bendix-type PT06A-10-6S (SR)**  
**Part Number: 62101011-000**


Please contact the factory for mating plugs installed on cables of your desired lengths. We can also provide cables with custom lengths for interfacing all our AC gage heads with our signal conditioners. Our cables are shielded and designed for optimum performance of our sensors and signal conditioners under industrial environments.

## SPECIAL CONTACT TIPS

Nine different contact tips are available for special applications and as replacements for standard tips supplied with most gage heads. All contact points are 4-48 AGD threaded. To order, select the proper contact tip number from the table below:

Tip #	Part Number	Tip #	Part Number
2	67010005-000	7	67010009-000
3	67010006-000	8	67010010-000
4	67010002-000	9	67010001-000
5	67010007-000	10	67010011-000
6	67010008-000		

When ordering, please make sure to provide your gage head model number to ensure compatibility.

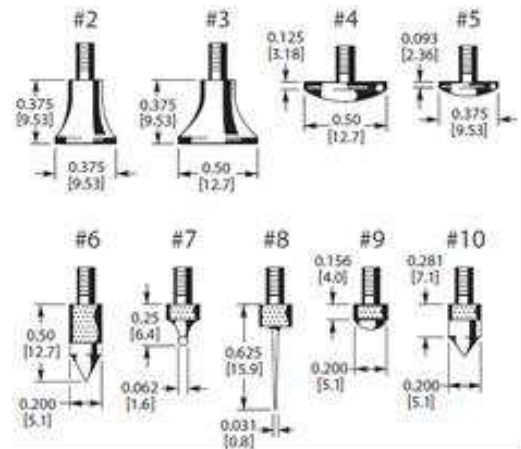

## PSD 40-15 DUAL RAIL POWER SUPPLY FOR DC LVDT'S

The PSD 40-15 power supply is designed for optimum operation of our DC LVDTs with voltage, current or digital outputs. The supply voltage is  $\pm 15\text{VDC}$  with 85 to 264 Volts AC, 45 to 65 Hertz line input. The current capability is 1A continuous and it can therefore operate multiple sensors. This DIN standard rail mount power supply is CE certified and UL listed.

Part Number: 02291339-000

Refer to the data sheet for detailed information on this product at:

<http://www.te.com/usa-en/product-CAT-PSI0009.html>



## INSTRUMENTATION FOR AC LVDT'S

TE Connectivity offers a comprehensive selection signal conditioners, panel displays and mini-controllers with voltage, current loop and digital outputs. These products are suitable for the most rigorous OEM, factory automation, process controls, materials testing, metrology and many other applications.

Data sheets and manuals can be downloaded from our web site at:

<http://www.te.com/usa-en/products/sensors/position-sensors/signal-conditioning-lvdt-rvdt.html?tab=pqp-story>



### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1000 Lucas Way  
Hampton, VA 23666  
United States  
Phone: +1-800-745-8008  
Fax: +1-757-766-4297  
Email: [customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

### EUROPE

MEAS Deutschland GmbH  
a TE Connectivity Company  
Hauert 13  
D-44227 Dortmund  
Germany  
Phone: +49-(0)231-9740-0  
Fax: +49-(0)231-9740-20  
Email: [customercare.dtmd@te.com](mailto:customercare.dtmd@te.com)

### ASIA

Measurement Specialties China Ltd.,  
a TE Connectivity Company  
No. 26, Langshan Road  
High-tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Phone: +86-755-33305088  
Fax: +86-755-33305099  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

### [te.com/sensorsolutions](http://te.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.

**DEALER / REVENDEDOR**

Brazil and South America / Brasil e América do Sul



**Address / Endereço:**

Rua Sete de Setembro, 2656  
13560-181 - São Carlos - SP  
Brazil / Brasil

**Phone / Telefone:**

+55 (16) 3371-0112  
+55 (16) 3372-7800

**Internet:**

[www.metrolog.net](http://www.metrolog.net)  
[metrolog@metrolog.net](mailto:metrolog@metrolog.net)

**[www.metrolog.net](http://www.metrolog.net)**