



LDM-8000

8 Channel LVDT/RVDT Signal Conditioner

SPECIFICATIONS

- 115/230 VAC line powered
- NEMA-13 rated enclosure
- 4 to 20mA loop and VDC outputs
- Zero, span and phase adjustable
- 2.5, 5 and 10kHz excitation frequencies
- Low noise, 3-pole Butterworth filter
- Master/slave capability
- Compatible with 4, 5 & 6-wire LVDTs/RVDTs
- Works with very low input impedance LVDTs & RVDTs

The **LDM-8000** is a line-powered, 8-channel LVDT/RVDT signal conditioner consisting of eight LDM-1000 signal conditioner modules and a PSD 40-15 power supply, pre-wired and mounted on a DIN rail inside a rugged NEMA 13 enclosure.

A wide range of gains, excitation voltages and frequencies ensure compatibility with virtually all LVDT and RVDT type transducers. Full-wave synchronous demodulators eliminate quadrature and harmonics to maximize external noise rejection. The amplifiers are capable of providing several different DC output voltage signals as well as 4-20mA current loop. The frequency response is internally selectable for each channel. The master/slave function (setup at the factory by default) allows synchronization of all 8 channels to prevent beat frequencies and cross talk between transducers.

The LDM-8000 provides everything you will need for accurately interfacing AC operated LVDTs or RVDTs to your position measuring system. It is housed in a NEMA 13 enclosure to protect it from dirt, dust, water and other contaminants commonly found in industrial environments. Transducer hookups are completed by mating to the sealed M/S-style bayonet connector, while the DC outputs are available at the BNC connectors.

FEATURES

- Eight LVDT/RVDT channels
- Very versatile
- Rugged NEMA-13 rated enclosure
- Bolt holes for easy mounting
- BNC connectors for outputs

APPLICATIONS

- Valve position feedback in power turbines
- Valve testing for nuclear power plants
- Materials and structure testing
- Process control systems
- Tests & Measurements

PERFORMANCE SPECIFICATIONS


SPECIFICATIONS	
Supply voltage and current	85 to 264 VAC, 45 to 65 Hertz, 600mA maximum
Output types and ranges	±5VDC, 0 to 5VDC, 0 to 10VDC, and 4 to 20mA (<i>DIP switch selectable, ±5VDC as shipped</i>)
Temp. coefficient of output	±0.02% of FSO per degree F [±0.036% of FSO per degree C] over operating temp. range
Operating temperature	-13°F to +185°F [-25°C to +85°C]
IEC 60529 & ratings	IP65; NEMA 13
Voltage output noise & ripple	5mV RMS maximum
Current output noise & ripple	25µA RMS maximum
Current loop resistance	700Ω maximum
Frequency response	250 or 1000Hz @ -3 dB (<i>3-pole Butterworth, DIP switch selectable, 250Hz as shipped</i>)
Non-linearity	±0.02% of FSO
Input sensitivity range	0.05 to 2.50 VRMS
Transducer excitation	
Voltage	1 or 3 VRMS (<i>DIP switch selectable; 3VRMS as shipped and with 18 to 30VDC supply voltage only</i>)
Current	25mA RMS
Frequency	2.5, 5 or 10kHz (<i>DIP switch selectable, 2.5kHz as shipped</i>)
Transducer requirements	
Transducer type	LVDT or RVDT with 4, 5 or 6 electrical connections
LVDT/RVDT input impedance	50Ω minimum @ 1 VRMS excitation ; 150Ω minimum @ 3 VRMS
LVDT/RVDT full scale output	0.05 to 2.50 VRMS

Notes:

All values are nominal unless otherwise noted; dimensions are in inch [mm]

FSO (Full Scale Output) is the largest absolute value of the outputs measured at the range ends

DIMENSIONS

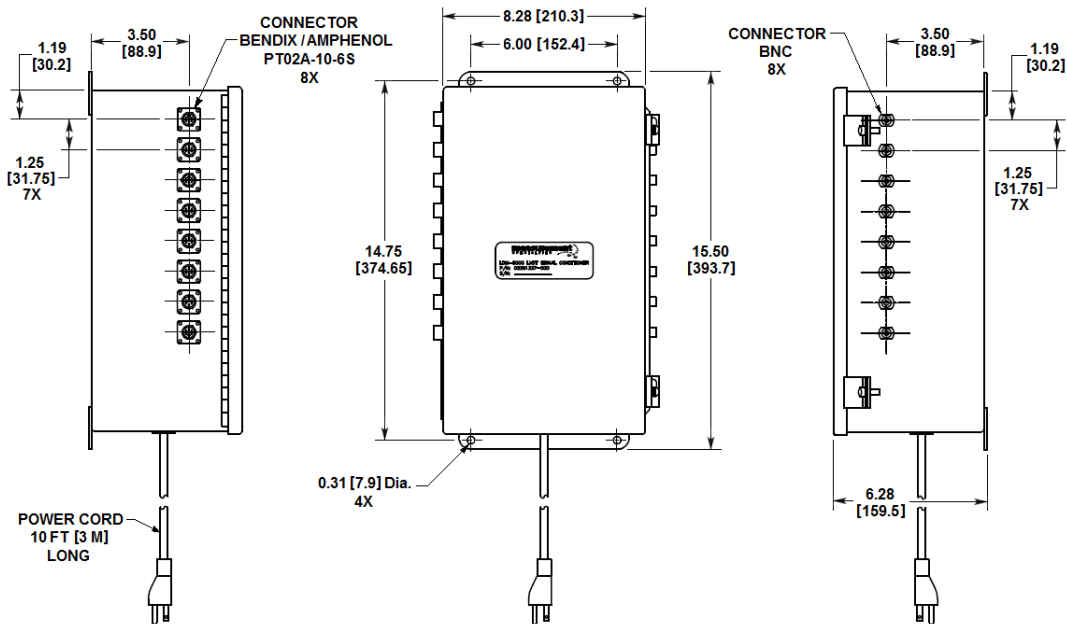

Dimensions are in inch [mm]

LDM-8000

8 Channel LVDT/RVDT Signal Conditioner

WIRING

Transducer connections PT06A-10-6S connectors	
Pin	Function
A	Secondary 1
B	No Connection
C	No connection
D	Secondary 2
E	Primary 2
F	Primary 1

Output connections BNC connectors	
Connection	Function
Center	Signal output
Outer	Signal common

ORDERING INFORMATION

Description	Part Number
LDM-8000 Signal Conditioner with ± 5 VDC outputs (<i>contact factory for other outputs</i>)	02291337-000
Cable assembly to connect HCA/HCI/GCA/R36AS to LDM-8000, PTO6A-10-6S to PTO6A-10-6P (1)	04290133-000
Cable assembly to connect MP Series LVDT to LDM-8000 Stripped & Tinned to PTO6A-10-6P (1)	04290594-000

(1) All cables are shielded, 10 foot long, and rated 80°C [176°F] operating. Consult factory for other lengths.

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
1000 Lucas Way
Hampton, VA 23666
United States
Phone: +1-800-745-8008
Fax: +1-757-766-4297
Email: sales@meas-spec.com

EUROPE

MEAS Deutschland GmbH (Europe)
a TE Connectivity Company
Hauert 13
D-44227 Dortmund
Germany
Phone: +49-(0)231-9740-0
Fax: +49-(0)231-9740-20
Email: info.de@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Phone: +86-755-33305088
Fax: +86-755-33305099
Email: info.cn@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.