




**For use in:**  
Factory Automation  
Robotic Motion Control  
X/Y Table position feedback  
Mil/aero test stands

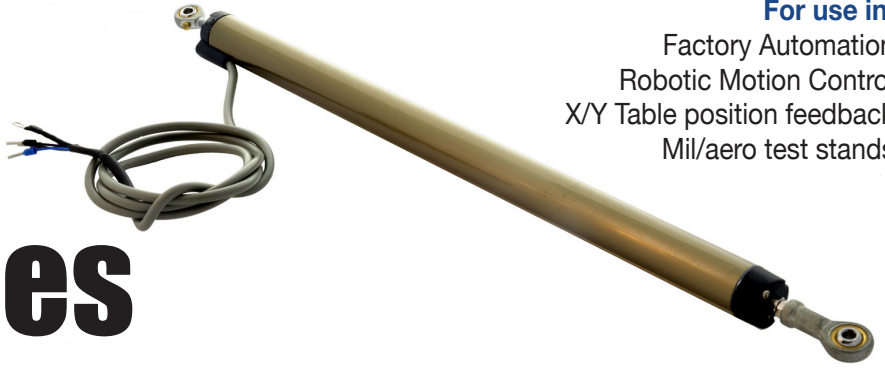

# LP-22 Series Linear Potentiometer

Linear Potentiometer Designed specifically for the factory automation industry

The LP-22 series linear potentiometer is a cost effect solution for factory automation linear position sensing applications like robotic motion control, X-Y table position feedback, flow control valve position, suspension travel, press and die position, injection molding machines, and mil/aero test stand applications. This 3-wire resistive film sensor is available in stroke lengths from 25 to 300 mm, with a maximun linearity error of 0.1% of full scale. The sensor is provided with swivel rod eyes at each end for self-alignment and easy mounting. A 22 mm diameter anodized aluminum housing rated IP-64 protects the unit from airborne contaminants, and the sensor is rugged enough to withstand the typical shock and vibration environments of industrial shop floors.

## Features:

- Full ranges from 25 to 300 mm (1 to 12 inches)
- Self-aligning swivel rod eyes on both ends
- 1 m long, 3-conductor cable
- 22 mm OD anodized aluminum housing

## Environmental Specifications:

Operating temperature	-40 to 150 C
Temperature coefficient	<1.5 ppm/°C
Shock	50 g (IEC 68-2-29, single hit)
Vibration	20 g (IEC 68-2-6)
Environmental protection	IEC IP-64

## Performance Specifications:

Input current	≤12 mA
Resolution	Infinite
Output range	0 to 100% of input
Repeatability	0.01 mm (0.0004 inch)
Max operating speed	5 m/s

**ALLIANCE SENSORS GROUP**  
A DIVISION OF H.G. SCHAEVITZ LLC


# LP-22 Series



## Configuration Information:

Product	LP-22-025	LP-22-050	LP-22-100	LP-22-150	LP-22-200	LP-22-250	LP-22-300
Range (mm)	25	50	100	150	200	250	300
Resistance $\pm 10\%$	1 k	2 k	4 k	5 k	5 k	5 k	5 k
Max input Voltage	12	24	24	36	36	36	36
Non-linearity %FS	$\pm 0.10$	$\pm 0.10$	$\pm 0.08$	$\pm 0.08$	$\pm 0.06$	$\pm 0.06$	$\pm 0.06$
Body length A (mm)	79	104	154	204	254	304	354
Dimension B (mm)	58	83	133	183	233	283	333
Weight (grams)	75	100	155	190	215	245	270
Rod eye c-c (mm)	139	164	214	264	314	364	414

## Ordering Information:

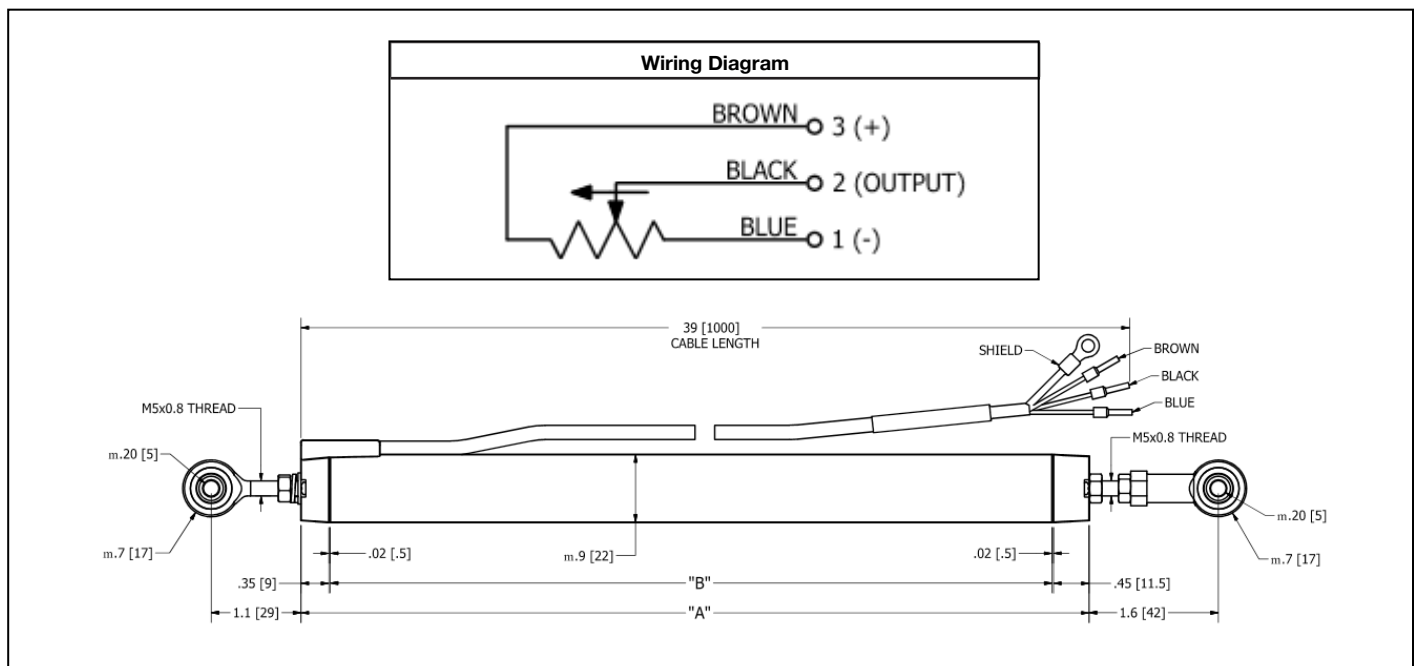

**ALLIANCE SENSORS GROUP**  
A DIVISION OF H.G. SCHAEVITZ LLC

Alliance Sensors Group  
102 Commerce Drive, Unit 8  
Moorestown, New Jersey 08057 USA  
Ph: 856-727-0250  
www.alliancesensors.com  
info@alliancesensors.com

**DISTRIBUTOR / DISTRIBUIDOR**

Brazil and South America / Brasil e América do Sul



**Address / Endereço:**

Rua Sete de Setembro, 2656  
13560-181 - São Carlos - SP  
Brazil / Brasil

**Phone / Telefone:**

+55 (16) 3371-0112  
+55 (16) 3372-7800

**Internet:**

[www.metrolog.net](http://www.metrolog.net)  
[metrolog@metrolog.net](mailto:metrolog@metrolog.net)

**ALLIANCE SENSORS GROUP**  
A DIVISION OF H.G. SCHAEVITZ LLC

Alliance Sensors Group  
102 Commerce Drive, Unit 8  
Moorestown, New Jersey 08057 USA  
Ph: 856-727-0250  
[www.alliancesensors.com](http://www.alliancesensors.com)  
[info@alliancesensors.com](mailto:info@alliancesensors.com)