

Accessories for LVDTs

ABOUT LVDT'S

Linear Variable Differential Transformers are non-contact, absolute position sensors. They include a transformer housed into a metal case and a ferromagnetic core which can be attached to an extension rod. The core slides inside the spool tube (also called boreliner) of the transformer. The transformer contains the coil assembly with primary and secondary windings and, in the case of DC LVDTs, the signal conditioning electronics as well.



Measurement Specialties, Inc. (NASDAQ MEAS) offers a full range of LVDTs as well as other position sensors, signal conditioners, and many other types of sensors.

Data sheets, application notes and manuals can be downloaded from our web site at <http://www.meas-spec.com/position-sensors.aspx> and <http://www.meas-spec.com/datasheets.aspx>.

Measurement Specialties acquired Schaevitz Sensors and the **Schaevitz™** trademark in 2000.

MATING CONNECTOR AND EXTENSION CABLES

There is only one connector mating plug for our LVDTs equipped with integral connector (HCA,HCA-RA, HCI, HCD, HCT, and HC485):

Description: Bendix-type PT06A-10-6S(SR)
Part Number: 62101011-000

Please contact us for mating plugs installed on cables of your desired lengths. We can also provide cables with custom lengths for interfacing all our AC LVDTs with our signal conditioners. Our cables are shielded and designed for optimum performance of our sensors and signal conditioners under industrial environments.


MOUNTING BLOCKS

Frequently, LVDT installations require a convenient method to mount them. Ready-made mounting blocks are available for most of our LVDT Series. Constructed of reinforced phenolic and other nonconductive materials with a low-temperature coefficient of expansion, our mounting blocks are a convenient, inexpensive and fast solution for LVDT installation.



To order, use the chart below to specify the part number for the appropriate LVDT diameter:

"A" Diameter	LVDT Diameter inch	LVDT Diameter mm	Use with LVDT Series	Part Number
0.83	0.812	20.62	HR	04560952-000
0.77	0.750	19.05	Various	04560950-000
0.49	0.472	12.00	M-12	04560956-000
0.39	0.375	9.53	MHR	04560954-000

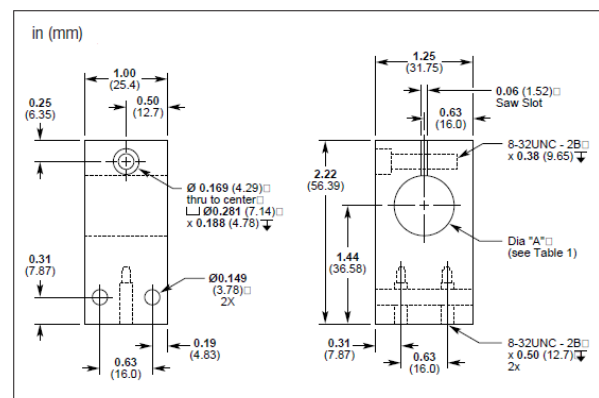

Accessories for LVDTs

CORE CONNECTING RODS AND CORES

LVDT installation requires a connecting rod between the LVDT core and the moving object being measured. Connecting rods made of magnetized, ferromagnetic, or high conductivity metals (Aluminum, Brass, Copper, etc.) **must not** be used as they interfere with the LVDT operation. Connecting rods made of plastic or other non-conductive materials are acceptable.

One must be extremely careful when attaching a core to a rod, as the core is a very sensitive part. It is annealed for the highest permeability, making this Nickel alloy part “soft”. Any excessive stresses, high heat, or physical damage would significantly affect the LVDT performance. Cores must be installed only hand tight and caution must be applied to avoid bending. Thread-locker adhesive can be applied. Cores must never be welded or crimped. For additional information, please refer to our applications note “LVDT selection, handling & installation guidelines” at: <http://www.meas-spec.com/position-sensors/linear-displacement-sensors/ac-lvdt.aspx>.

Measurement Specialties has a large selection of high-quality connecting rods. Our connecting rods are fabricated from AISI 300 Series austenitic (non-ferromagnetic) stainless steel to prevent distortion of the LVDT magnetic field. They are threaded end to end. To order, check the thread size of the core for the LVDT you are using and select the part number in the table below function of the length (L) that you need:

Length		Thread size					
inch	mm	1-72 UNF-2B	40 UNC-2B	6-40 UNF-2B	M2x0.4-6H	M3x0.5-6H	M4x0.7-6H
6	152.4	05282945-006	05282946-006	05282947-006	05282976-006	05282977-006	05282978-006
12	304.8	05282945-012	05282946-012	05282947-012	05282976-012	05282977-012	05282978-012
24	609.6	05282945-024	05282946-024	05282947-024			
36	914.4	05282945-036	05282946-036	05282947-036			

We also sell replacement cores (please contact us).

PSD 40-15 DUAL RAIL POWER SUPPLY FOR DC LVDT'S

The PSD 40-15 power supply is designed for optimum operation of our DC LVDTs with voltage, current or digital outputs. The supply voltage is $\pm 15\text{VDC}$ with 85 to 264 Volts AC, 45 to 65 Hertz line input. The current capability is 1A continuous and it can therefore operate multiple sensors. This DIN standard rail mount power supply is CE certified and UL listed.

Part Number: 02291339-000

Refer to the data sheet for detailed information on this product at: <http://www.meas-spec.com/datasheets.aspx> (in Position Sensor Instrumentation)



INSTRUMENTATION FOR AC LVDT'S

Measurement Specialties offers a comprehensive selection signal conditioners, panel displays and mini-controllers with voltage, current loop and digital outputs. These products are suitable for the most rigorous OEM, factory automation, process controls, materials testing, metrology and many other applications.

Data sheets and manuals can be downloaded from our web site at: <http://www.meas-spec.com/position-sensors/position-sensor-instrumentation/lvdt-signal-conditioning.aspx>



Accessories for LVDTs

CONTACT INFORMATION

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: sales@meas-spec.com Web: www.meas-spec.com	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: info.de@meas-spec.com Web: www.meas-spec.com	Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: info.cn@meas-spec.com Web: www.meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

DISTRIBUTOR / DISTRIBUIDOR

Brazil and South America / Brasil e América do Sul



Address / Endereço:

Rua Sete de Setembro, 2656
13560-181 - São Carlos - SP
Brazil / Brasil

Phone / Telefone:

+55 (16) 3371-0112
+55 (16) 3372-7800

Internet:

www.metrolog.net
metrolog@metrolog.net

www.metrolog.net