

## 5200 & 5300 STANDARD TRANSDUCER MATRIX

MODEL NO.  
2 SERIES: **M** **U**

CODE	ACCURACY GRADE
2	STANDARD
3	UPGRADE

CODE	WETTED MAT'L
0	17-4PH(M SERIES)
0	316L (U SERIES)
1	316L(M SERIES)

	NO SELECTION
0	OXYGEN CLEAN B40.1 LEVEL IV (ONLY FOR M SERIES)
1	
2	316L SS SNUBBER

CODE	LABEL TYPE
0	ADHESIVE LABEL
1	LASER MARKING

CODE	PRESSURE REF.
G	GAUGE
S	SEALED
C	COMPOUND
A	ABSOLUTE

NOTE 2


CODE	OUTPUT SIGNAL	SUPPLY VOLTAGE
3	0.5 TO 4.5 V Ratio-metric	5±0.25V Protected to 30V
4	1 TO 5 V	8-30V
5	4 TO 20 mA	9-30V
6	0 TO 5 V	8-30V
7	0 TO 10 V	15-30V
8	1 TO 6 V	8-30V
9	0.5 TO 4.5 V	M SERIES 5-30V
9	0.5 TO 4.5 V	U SERIES 8-30V

CODE	CONNECTION TYPE
1	CABLE 2 FT
E	CABLE 3 FT
2	CABLE 4 FT
3	CABLE 10 FT
4	PACKARD CONNECTOR A
5	BAYONET CONNECTOR
6	FORM C
7	FORM A
9	PACKARD CONNECTOR B
D	M12 CONNECTOR
M	CABLE 1 M
N	CABLE 2 M
P	CABLE 5 M
R	CABLE 10 M
A	AMP CONNECTOR
S	SUMITOMO CONNECTOR
C	1/2" NPT CONDUIT

CODE	PRESSURE PORT TYPE	RECOMMENDED TORQUE (Nm)
2	1/4-19 BSPP	30-35
3	G3/8 JIS B 2351	35-40
4	7/16-20 UNF-2A MALE SAE J514 STRAIGHT THREAD O-RING BUNA-N 70SH -904 ID 8.92mm X W 1.83mm	18-20
5	1/4-18 NPT	2-3 TFFT
6	1/8-27 NPT	2-3 TFFT
B	G1/4-19 JIS B2351	30-35
E	1/4-19 BSPT	2-3 TFFT
F	1/4-19 BSPP FEMALE	30-35
G	M14 X 1.5 mm ISO 6149-2	30-35
H	7/16-20 UNF-3A AS4395 MALE	18-20
M	M18 X 1.5 mm	35-40
P	7/16-20 UNF FEMALE SAE J514 STRAIGHT HREAD INTEGRAL VALVE DEPRESSOR	15-16
Q	M10 X 1.0 mm	15-16
R	7/16-20 UNF FEMALE SAE J514 STRAIGHT HREAD	15-16
S	M12 X 1.5 mm	25-30
T	M22 X 1.5 mm	40-45
U	G1/4 DIN3852 FORM E GASKET DIN3869-14 NBR	30-35
W	M20 X 1.5 mm	40-45

PRESSURE RANGE	
PSI	BAR
002P	.14B
.	.
.	.
15KP	01KB

### OUTLINE M5200 U5200 U5300

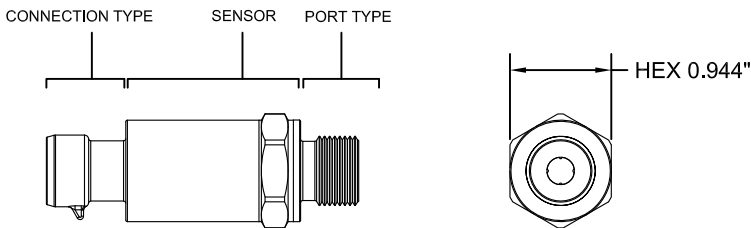

### WEATHER-PROOF RATING

CONNECTION	IP CODE
BAYONET	IP67
PACKARD	IP66
CABLE	IP67
1/2NPT CONDUIT	IP67
M12	IP67
AMP/TE	IP67
FORM C	IP65
FORM A	IP65
SUMITOMO	IP67

### CONNECTION TYPES

CONNECTION	DESCRIPTION	MATING HOUSING P/N	MATING TERMINAL P/N	MATING RUBBER SEAL P/N
BAYONET	BAYONET PTH-10-6P OR EQUIV	PT06A-10-6S MIL-C-26482	-	-
PACKARD	3-PIN METRI-PACK 150	12078090	12103881, QTY 3	-
Cable & 1/2NPT CONDUIT	4-WIRE .22 AWG, SHIELDED, PVC JACKET, 105 DEGC	-	-	-
M12	BINDER SERIES 713, 09 3431 77 04 OR EQUIV	4-POS FEMALE, RECOMMENDED WWW.FINECABLES.COM.PN:MB12FWAFF04ST-3	-	-
AMP/TE	AMP / TE 3-PIN ECONOSEAL J SERIES	174357-2 & 174358-7	171630-1 (AWG 20-24) 171662-1 (AWG 16-20), QTY 3	172746-1 (AWG 20-24) 172888-2 (AWG 16-20), QTY 3
FORM C	INDUSTRIAL STANDARD 9.4MM FORM C	HIRSCHMANN 933 024-100, OR, ATAM KD046000B7 (SEAL INCL.)	-	HIRSCHMANN 730 185-002
FORM A	DIN EN 175 301-803-A 18MM	HIRSCHMANN 931 969-100, OR, ATAM KA245000B4 (SEAL INCL.)	-	HIRSCHMANN 730 801-002
SUMITOMO	SUMITOMO 3-PIN HV040	6189-6907	8100-3067 (AWG 20-22) 8100-3068 (AWG 16-18) QTY 3	7165-1075 (INS. DIA 1.1-1.6MM) 7176-0621 (INS. DIA 1.6-1.9MM) 7165-0622 (INS. DIA 1.8-2.2MM), QTY 3

# PRESSURE TRANSDUCER INSTALLATION MANUAL


## Wiring Connection



## Precautions

Connection type	Current Output	Voltage Output
<b>BAYONET CONNECTOR</b> 	 Pin A: +Supply Pin B: +Supply Other Pins: NC.	 Pin A: +Supply Pin B: +Output Pin C: Common Other Pins: NC.
<b>PACKARD CONNECTOR</b> 	Connection: code 4  Pin A: +Supply Pin B: +Supply	Connection: code 9  Pin A: +Supply Pin B: Common Pin C: +Output
<b>CONNECTOR FORM C</b> 	 Pin 1: +Supply, Pin 2: -Supply Pin 3: NC, Pin 4: NC.	 Pin 1: +Supply, Pin 2: +Output Pin 3: Common, Pin 4: NC.
<b>CONNECTOR FORM A</b> 	 Pin 1: +Supply, Pin 2: -Supply, Pin 3: NC, Pin 4: NC.	 Pin 1: +Supply, Pin 2: Common, Pin 3: +Output, Pin 4: NC.
<b>M12 CONNECTOR</b> 	 Pin 1: +Supply, Pin 2: NC., Pin 3: -Supply, Pin 4: NC.	 Pin 1: +Supply, Pin 2: +Output, Pin 3: Common, Pin 4: NC.
<b>CABLE &amp; 1/2" NPT CONDUIT</b> 	 ① Red +Supply ② Black -Supply	 ① Red +Supply ② Black Common ③ White +Output
<b>AMP/TE CONNECTOR</b> 	 Pin 1: +Supply Pin 2: -Supply Pin 3: NC.	 Pin 1: +Supply Pin 2: Common Pin 3: +Output
<b>SUMITOMO HV040</b> 	 Pin 1: +Supply Pin 2: -Supply Pin 3: NC.	 Pin 1: +Supply Pin 2: Common Pin 3: +Output


Before installation, please verify that the product matches its intended use, especially the pressure fitting, pressure range, electrical specification and connection.

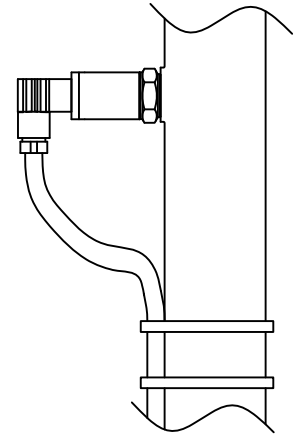

Can be mounted horizontal or vertical, with pressure port facing downwards. Plug the cable facing downwards to prevent water collection in the cable entry.

Mount transducer before fasten the cable to prevent cable twisting.

Sensitive diaphragm inside. Do not stick anything into the pressure port.

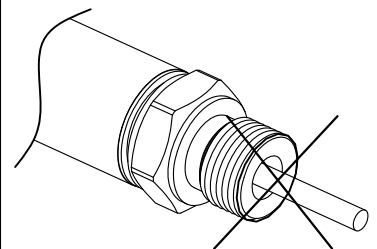

### NOTES:

1. NC PINS ARE FOR FACTORY USE ONLY. CUSTOMER SHALL NOT USE THESE CONNECTIONS!
2. TORQUE DEPENDS ON DIFFERENT PARAMETERS SUCH AS SEALING MATERIAL, MATING MATERIAL, THREAD LUBRICATION AND PRESSURE LEVEL. TFFT MEANS TURNS FROM FINGER TIGHT.
3. FOR CABLE CONNECTION, THE DRAIN WIRE IS TERMINATED TO THE PRESSURE PORT INSIDE THE TRANSMITTER.
4. CUSTOMERS ARE RECOMMENDED TO USE SHIELDED CABLE WHEN POSSIBLE FOR BEST SIGNAL STABILITY.
5. THE "INSTRUCTIONS" MAY NOT BE ALL APPLICABLE TO CUSTOMER SPECIALS. BE CAUTIOUS ON THE DIFFERENCES ESPECIALLY WIRING.
6. FOR MORE PRODUCT INFORMATION, PLEASE REFER TO OUR WEBSITE: WWW.MEAS-SPEC.COM

**DEALER / REVENDEDOR**

Brazil and South America / Brasil e América do Sul



**Address / Endereço:**

Rua Sete de Setembro, 2656  
13560-181 - São Carlos - SP  
Brazil / Brasil

**Phone / Telefone:**

+55 (16) 3371-0112  
+55 (16) 3372-7800

**Internet:**

[www.metrolog.net](http://www.metrolog.net)  
[metrolog@metrolog.net](mailto:metrolog@metrolog.net)

**[www.metrolog.net](http://www.metrolog.net)**