
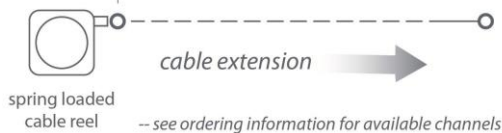


The PT5E encoder-based cable-extension transducer offers a unique thermoplastic cable that has virtually an infinite fatigue life. This cable, known as V62, has properties that are superior for high cycle and rugged applications.

Like Celesco's other transducers, the PT5E installs in minutes, functions properly without perfectly parallel alignment, and fits easily into small areas. The PT5E offers additional installation flexibility since its cable exit can be rotated relative to the mounting surface, providing four different cable exit orientations.

#### Output Signal

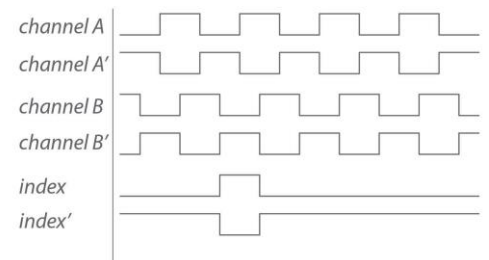

## PT5E

### Cable Actuated Sensor Industrial Grade • Incremental Encoder

Linear Position to 250 inches (6350 mm)

Hard Anodized Aluminum Enclosure

High Cycle Applications

IP67 • NEMA 6 Protection

#### General

<b>Full Stroke Range Options</b>	0-50 to 0-250 inches
<b>Output Signal Options</b>	incremental encoder (quadrature)
<b>Accuracy</b>	±0.04% to ±0.1% full stroke. (see ordering information)
<b>Repeatability</b>	±0.01% to ±0.02% full stroke (see ordering information)
<b>Resolution</b>	10 to 250 pulses per inch
<b>Measuring Cable</b>	stainless steel or thermoplastic
<b>Enclosure</b>	hard anodized aluminum
<b>Sensor</b>	optical encoder
<b>Maximum Measuring Cable Velocity</b>	see ordering information
<b>Maximum Retraction Acceleration</b>	see ordering information
<b>Weight</b>	5 lbs. max.

#### Electrical

<b>Input Voltage</b>	see ordering information
<b>Input Current</b>	see ordering information



#### Environmental

<b>Enclosure</b>	NEMA 4/6, IP 65/67
<b>Operating Temperature</b>	0° to 160°F (-17° to 71°C)
<b>Vibration</b>	up to 10 g to 2000 Hz maximum

# PT5E


Industrial Grade • Incremental Encoder

## Outline Drawing

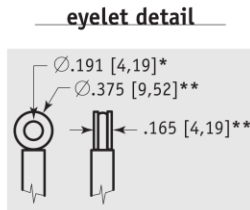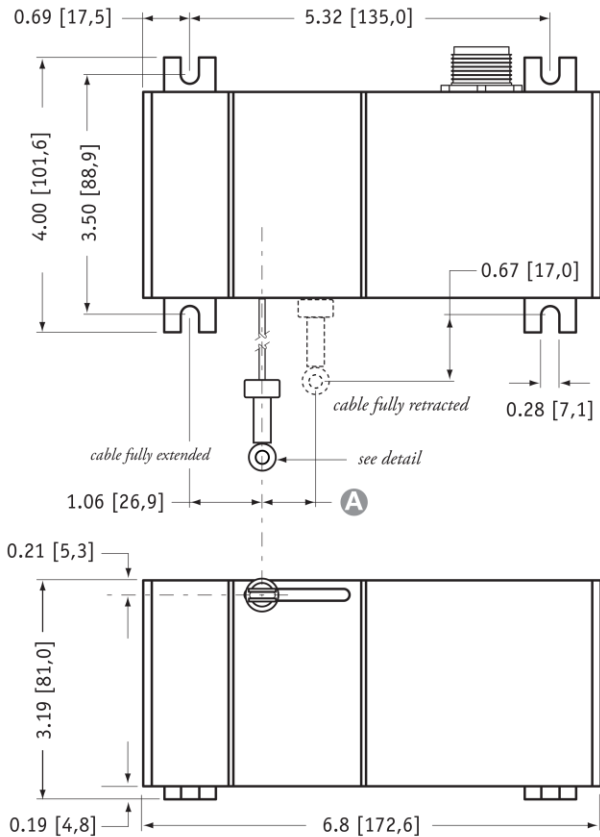

### A DIMENSION (inches[mm])

RANGE	DIMENSION (inches[mm])	
	N34 measuring cable	S47 & V62 measuring cable
50	0.23 [5,9]	0.39 [9,9]
100	0.46 [11,7]	0.78 [19,7]
150	0.69 [17,6]	1.16 [29,6]
200	0.92 [23,5]	n/a
250	1.16 [29,3]	n/a

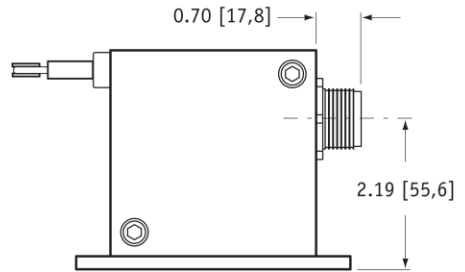

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+,.13 -.03]  
\*\* tolerance = +.005 -.005 [+,.13 -.13]

## Ordering Information

### Model Number:

**PT5E** -      -      -      -      -      -       
order code:      **R**      **A**      **B**      **C**      **D**      **E**

### Sample Model Number:

**PT5E - 100 - N34 - FR - 100 - AB-TTL - M6**

- R** range: 100 inches
- A** measuring cable: .034 nylon-coated stainless
- B** cable exit: front
- C** resolution: 100±2 pulses per inch
- D** output signal: TTL/CMOS compatible driver
- E** electrical connection: 6-pin plastic connector

### Full Stroke Range:

<b>R</b> order code:	50	100	150	200	250	1250	2500	3750	5000	6250
full stroke range, min:	50 in.	100 in.	150 in.	200 in.	250 in.	1250 mm	2500 mm	3750 mm	5000 mm	6250 mm
△ accuracy (± % of f.s.):	.1	.07	.06	.05	.04	.1	.07	.06	.05	.04
repeatability (± % of f.s.):	.02	.01	.01	.01	.01	.02	.01	.01	.01	.01
cable tension (±20%):	41 ounces			21 ounces		11,4 N			5,8 N	
max. cable velocity • acceleration:	300 in./sec • 5 g			120 in./sec • 2 g		8 M/sec • 5 g			3 M/sec • 2 g	

Measuring Cable:

<b>A</b> order code:	<b>N34</b>	<b>S47</b>	<b>V62</b>
	.034 nylon-coated stainless steel <i>available in all ranges</i>	.047 stainless steel <i>all ranges up to 150 inches</i>	.062 thermoplastic <i>all ranges up to 150 inches</i>

Cable Exit:

<b>B</b> order code:	<b>UP</b> up	<b>DN</b> down	<b>FR</b> front	<b>BK</b> back
	inches [mm]			

Resolution


<b>C</b> order code:	<b>10</b>	<b>100</b>	<b>200</b>	<b>250</b>
resolution for <b>english</b> ranges:	10 ±0.2 pulses per inch	100 ±2 pulses per inch	200 ±4 pulses per inch	250 ±5 pulses per inch
<b>C</b> order code:	<b>.5</b>	<b>5</b>	<b>10</b>	<b>12.5</b>
resolution for <b>metric</b> ranges:	0.5 ±0.01 pulses per mm	5 ±0.1 pulses per mm	10 ±0.2 pulses per mm	12.5 ±0.3 pulses per mm

Output Signals:

<b>D</b> order code:	<b>AB-TTL</b>	<b>AB-OC</b>	<b>ABC-LD</b>	<b>ABC-UD</b>	<b>ABZC-UD</b>
output driver:	TTL/CMOS compatible	open collector	5-volt line driver	universal line driver <i>(no index)</i>	universal line driver <i>(with index)</i>
input voltage:	4.5...13.2 VDC	10.8...26.4 VDC	5 VDC	5...30 VDC	5...30 VDC
max. source/sink current:	20 mA sink	20 mA sink	20 mA sink	20 mA source/sink	20 mA source/sink
max. input current:	80 mA	80 mA	150 mA	100 mA, no load	100 mA, no load

**Electrical Connection:**

**B** order code:

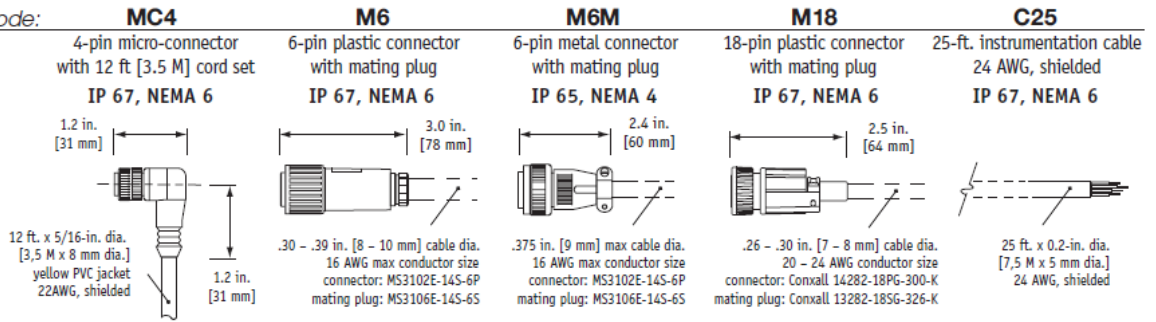


**4-pin cordset:**




pin	color code	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
1	RED-BLK TR.	input voltage	input voltage
2	RED-WHT TR.	channel A	channel A
3	RED	channel B	channel B
4	GREEN	common	common

**6-pin mating plug:**




pin	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
A	input voltage	input voltage
B	common	common
C	channel A	channel A
D	channel B	channel B
E	-	channel A'
F	-	channel B'

**18-pin mating plug:**



pin	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
1	input voltage	input voltage
2	common	common
3	channel B	channel B
6	channel A	channel A
7	-	index
11	-	channel B'
12	-	channel A'
15	-	index'

**25-ft. instrumentation cable:**



pin	color	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
	red	input voltage	input voltage
	black	common	common
	green	channel A	channel A
	white	channel B	channel B
	blue	-	channel A'
	brown	-	channel B'
	yellow	-	index
	orange	-	index'

**A** Total accuracy includes uncertainty due to resolution and is calculated:  $\{ \pm [(\%FS)(FS) + \text{length of 1 pulse}] \}$

Example: Model Number: PT5E-100-N34-FR100-AB-TTL-M6

Full Stroke: 100 inches

Accuracy:  $[.07\% (100 \text{ in.}) + 1/100 \text{ in.}] = \pm .08 \text{ inches}$

**NORTH AMERICA**

Measurement Specialties, Inc.,  
a TE Connectivity company  
20630 Plummer Street  
Chatsworth, CA 91311  
Tel +1 800 423 5483  
Tel +1 818 701 2750  
Fax +1 818 701 2799  
info@celesco.com

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

PT5E 12/01/2015