

THE FOLLOWING PAGE CONTAINS THE CONNECTION DETAILS

It is your responsibility to ensure that the transducer identification matches the connection details, including any RDP modification (T.M) references.

Please ensure that the transducer has not been modified or fitted with a cable or extension.

Particularly on DC-DC powered transducers, incorrect connection may cause **IRREPERABLE DAMAGE** to the transducer which is **NOT COVERED BY WARRANTY**

IF YOU ARE IN ANY DOUBT PLEASE CONTACT US

DESPATCH:- INCLUDE CD1013 IF TRANSDUCER HAS NO CABLE FITTED.



SSD SERIES (TM85A & B)




CONNECTION DETAILS

Dual Supply	
+13 to +20V Input	RED
-13 to -20V Input	GREEN
0V Common I/P, O/P	BLACK
Output	WHITE


Single Supply *	
26 to 40V Input (Vs)	RED
Supply Common	GREEN
Output Common **	BLACK
Output	WHITE

* SUPPLY MUST BE FULLY FLOATING
** OUTPUT COMMON FLOATS AT Vs/2

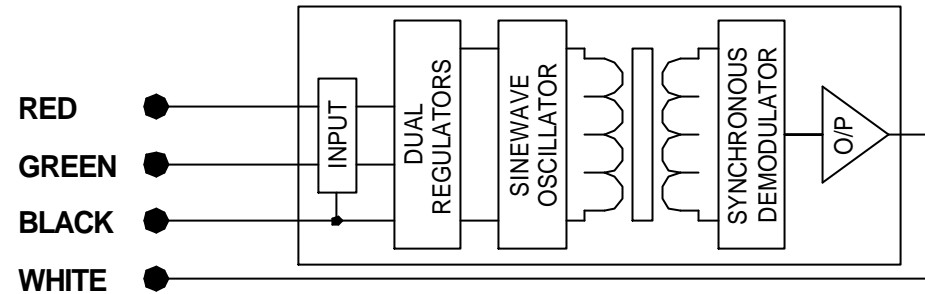

LOAD IMPEDANCE: 2k (min.) Ohms with dual supply.
20k (min.) Ohms with single supply.

SUPPLY: Smooth d.c. voltage 25mA typical

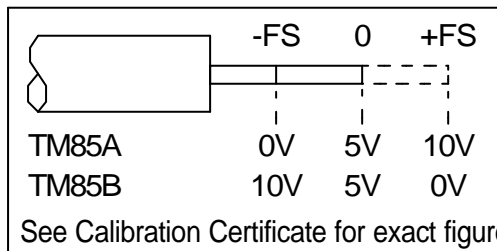

For transducers without cable see CD1013 for fitting instructions

**NOTE : INCORRECT CONNECTION MAY CAUSE IRREPARABLE DAMAGE
CONTACT OUR SALES DEPARTMENT IF YOU REQUIRE ASSISTANCE**

RDP U.K.
Tel 01902 457512
Fax 01902 452000



Certificate No. FM 13141
BS EN ISO 9001:2000

**MADE IN THE
UNITED KINGDOM**

Doc. Ref. WDUK1352
ISSUE 4 - 14 SEP 2004

RDP U.S.A.
Tel 610 469 0850
Fax 610 469 0852

Distribuidor

Brasil e América do Sul

CONTATO

Endereço

Rua Sete de Setembro, 2656 - Centro
13560-181 - São Carlos - SP - Brasil

Telefone

+ 55 (16) 3371-0112
+ 55 (16) 3372-7800

Internet

www.metrolog.net
metrolog@metrolog.net

