

Specifications

Power Supply

Power supply voltage 2.5 to 3.6 Vdc

2 off AA 1.5V primary cells

Battery Life

Based on 2 Ah capacity batteries

Continuous operation 35 hours

Standby mode (powered off) 1.5 years

Radio

Radio type Licence exempt transceiver

Radio frequency 2.4 GHz

Transmit power 10 mW

Range Up to 800 m

Environmental


Operating temperature range -10 to 50 °C

Storage temperature range (no batteries) -40 to 85 °C

Maximum humidity 95% non-condensing

IP rating (ACM and ACMi) IP67/Nema4

Mechanical

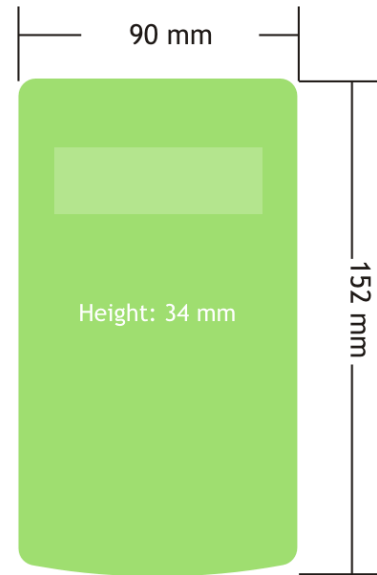

Electrical



Order Codes

T24-HR

Wireless handheld display for unlimited transmitters

TR100-CA

Black leather case with clear viewing window with shoulder strap

Mantracourt Electronics Ltd
The Drive, Farringdon
Exeter, Devon, UK
EX5 2JB

Tel: +44 (0)1395 232020
Email: sales@mantracourt.com

mantracourt.com



Distribuidor

Brasil e América do Sul

CONTATO

Endereço

Rua Sete de Setembro, 2656 - Centro
13560-181 - São Carlos - SP - Brasil

Telefone

+ 55 (16) 3371-0112
+ 55 (16) 3372-7800

Internet

www.metrolog.net
metrolog@metrolog.net

