



## XS-C SERIES

### High Pressure Sealed AC LVDT

#### SPECIFICATIONS

- Operating pressures to 3,000 PSI
- Bulkhead mounting
- Stroke ranges from  $\pm 0.25$  to  $\pm 1$  inch
- AISI 304 stainless steel housing
- Magnetically shielded
- Wide operating temperature range
- Shock and vibration tolerant

The **XS-C Series** high pressure sealed LVDTs are the ideal solution for displacement measurement in pressure-sealed chambers, hydraulic actuators and pressure vessels. Constructed with heavy-wall 304 Series stainless steel, the all-welded XS-C is highly resistant to corrosive environments. It is suitable for operating pressures up to 3,000 PSI (proof pressures up to 4,500 PSI) and temperatures up to +300°F [+150°C].

The XS-C is available in stroke ranges of  $\pm 0.25$  inch [ $\pm 6.35$ mm] to  $\pm 1$  inch [ $\pm 25.4$ mm], with imperial or metric threaded cores. All models incorporate internal magnetic and electrostatic shielding, protecting it from external magnetic influences. The XS-C Series is compatible with all Measurement Specialties LVDT signal conditioners, controllers and readouts.

#### FEATURES

- Sealed 304 Series stainless steel housing
- High pressure and temperature operation
- Bulkhead mount design
- 400Hz to 5KHz operating frequency range
- Shock and vibration tolerant
- Calibration certificate supplied with all units

#### APPLICATIONS

- Hydraulic actuators
- Pressure chambers & vessels
- Continuous casting mold clamping
- Tundish slide valve position feedback
- Automatic transmission servo testing
- Rolling mill gap feedback

**XS-C SERIES**

High Pressure Sealed AC LVDT

**PERFORMANCE SPECIFICATIONS**

<b>ELECTRICAL SPECIFICATIONS</b>			
<b>Parameter</b>	<b>XS-C 249</b>	<b>XS-C 499</b>	<b>XS-C 999</b>
Stroke range	±0.25 [±6.35]	±0.50 [±12.7]	±1.00 [±25.4]
Sensitivity V/V/inch [mV/V/mm]	1.7 [66.9]	1.0 [39.4]	0.8 [31.5]
Output at stroke ends (*)	425mV/V	500mV/V	800mV/V
Phase shift	+5°	+2°	-1°
Input impedance (PRIMARY)	800Ω	938Ω	770Ω
Output impedance (SECONDARY)	940Ω	1130Ω	1400Ω
Non-linearity (% of FR), maximum	±0.25		
Input voltage, sine wave	3 VRMS		
Input frequency range	400Hz to 5kHz		
Test input frequency	2.5kHz		
Null voltage, maximum	0.5% of FRO		



<b>ENVIRONMENTAL SPECIFICATIONS &amp; MATERIALS</b>	
<b>Parameter</b>	<b>All Models</b>
Operating pressure	3,000 PSI [207 bars]
Proof Pressure	4,500 PSI [310 bars]
Operating temperature	-67°F to +302°F [-55°C to +150°C]
Shock survival	1,000 g (11ms half-sine)
Vibration tolerance	20 g up to 2KHz
Housing material	AISI 304 Series stainless steel
Electrical connection	Six lead-wires, stranded 28 AWG, PTFE insulated, 1 foot [0.3m] long <i>(longer wires optional)</i>
IEC 60529 rating	IP61

**Notes:***Dimensions are in inch [mm]**All values are nominal unless otherwise noted**Electrical specifications are for the test frequency indicated in the table**(\*): Unit for output at stroke ends is millivolt per volt of excitation (input voltage)**FR: Full Range is the stroke range, end to end; FR=2xS for ±S stroke range**FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range***MECHANICAL SPECIFICATIONS**

<b>Parameter</b>	<b>XS-C 249</b>	<b>XS-C 499</b>	<b>XS-C 999</b>
Main body length "A"	3.00 [76.2]	4.65 [118.1]	7.88 [200.2]
Core length "B"	1.80 [45.7]	3.00 [76.2]	3.80 [96.5]
Core null position "C"	1.39 [35.3]	2.23 [56.6]	3.25 [82.6]
Body weight, oz [g]	3.88 [110]	4.62 [131]	6.04 [171]
Core weight, oz [g]	0.12 [3.4]	0.30 [8.5]	0.37 [10.5]

# XS-C SERIES

High Pressure Sealed AC LVDT

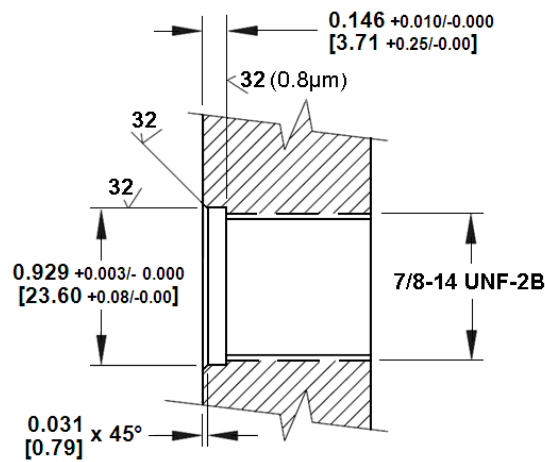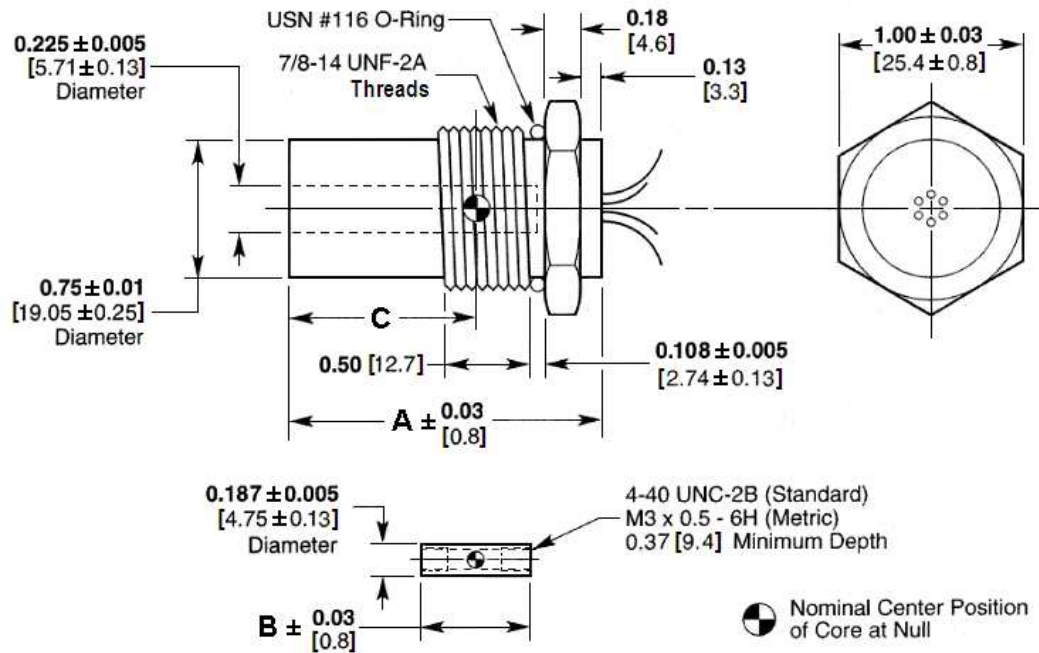


**Mating detail for installation**

*Dimensions are in inches [mm]*

## XS-C SERIES

High Pressure Sealed AC LVDT

### WIRING INFORMATION

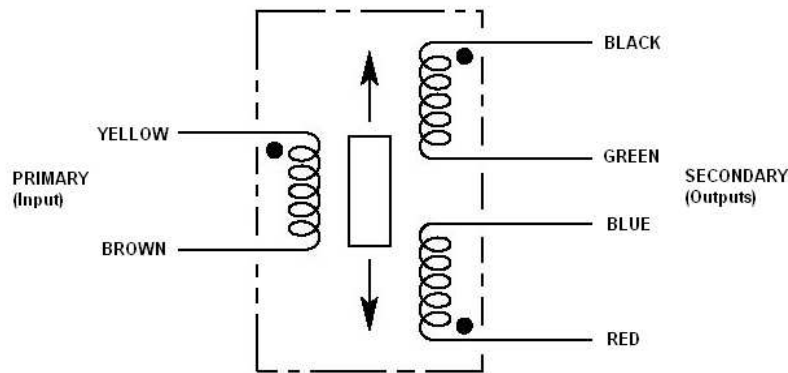

Connect Blue to Green for differential output

### ORDERING INFORMATION

Description	Model	Part Number
$\pm 0.25$ inch LVDT	XS-C 249	02560551-000
$\pm 0.5$ inch LVDT	XS-C 499	02560549-000
$\pm 1$ inch LVDT	XS-C 999	02560548-000
OPTIONS		
Metric threaded (M3x0.5-6H) core option	All models	XXXXXXXX-006
10 foot long lead-wires	Consult factory	XXXXXXXX-040

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1000 Lucas Way  
Hampton, VA 23666  
United States  
Phone: +1-800-745-8008  
Fax: +1-757-766-4297  
Email: sales@meas-spec.com

#### EUROPE

MEAS Deutschland GmbH (Europe)  
a TE Connectivity Company  
Hauert 13  
D-44227 Dortmund  
Germany  
Phone: +49-(0)231-9740-0  
Fax: +49-(0)231-9740-20  
Email: info.de@meas-spec.com

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Phone: +86-755-33305088  
Fax: +86-755-33305099  
Email: info.cn@meas-spec.com

#### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

**DISTRIBUTOR / DISTRIBUIDOR**

Brazil and South America / Brasil e América do Sul



**Address / Endereço:**

Rua Sete de Setembro, 2656  
13560-181 - São Carlos - SP  
Brazil / Brasil

**Phone / Telefone:**

+55 (16) 3371-0112  
+55 (16) 3372-7800

**Internet:**

[www.metrolog.net](http://www.metrolog.net)  
[metrolog@metrolog.net](mailto:metrolog@metrolog.net)

**[www.metrolog.net](http://www.metrolog.net)**