




## DIMENSIONS

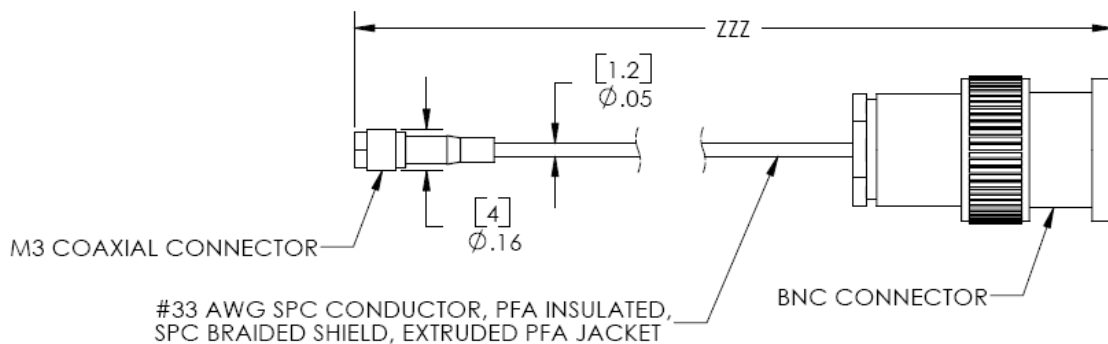

## DESCRIPTION

IEPE plug and play accelerometer cable assembly featuring M3 Coaxial connector and BNC connector. Standard length is 120 inches. Mates with accelerometer model 7101A, 7102A.

## FEATURES

- M3 Coaxial Connector to BNC Connector
- SPC Braided Shield
- #33 AWG Conductors
- Extruded PFA Jacket
- 55°C to +200°C Temp Range

## APPLICATIONS

- Laboratory Testing
- Modal Applications
- General Use
- Vibration Monitoring
- Shock Monitoring

# 311 Cable Assembly

---

## ORDERING CODE

---

311-ZZZ (-ZZZ designates length in inches, -120 standard)

### NORTH AMERICA

**Measurement Specialties, Inc.**  
1000 Lucas Way  
Hampton, VA 23666  
**Sales and Customer Service**  
Tel: +1-800-745-8008 or  
+1-757-766-1500  
Fax: +1-757-766-4297  
t&m@meas-spec.com

### EUROPE

**Measurement Specialties**  
**26 Rue des Dames**  
F78340 Les Clayes-sous-Bois  
France  
**Sales and Customer Service**  
Tel: +33 (0) 1 79 33 00  
Fax: +33(0)1 34 81 03 59  
t&m@meas-spec.com

### ASIA

**Measurement Specialties**  
**(China), Ltd.**  
No. 26 Langshan Road  
Shenzhen High-Tech Park  
(North)  
Nanshan District  
Shenzhen, China 518107  
**Sales and Customer Service**  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
t&m@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.